



OKS 476

Multipurpose Grease, for Food Processing Technology

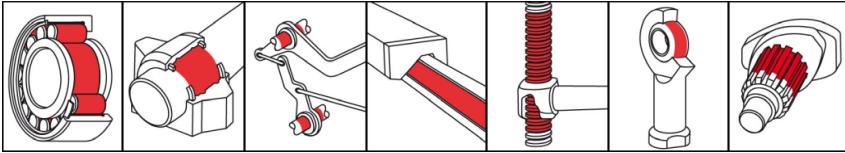

Description

Universal multipurpose grease for food processing technology for lubricating rolling and friction bearings and other machine elements.

Applications

- Grease lubrication of rolling and friction bearings, joints, linear drives and chains
- Lubrication of fittings, seals, moulded parts and elements of elastic rubber materials in the hot- and cold-water segment
- Lubrication of fittings or machines in dairies, breweries, bakeries, slaughterhouses, etc.

Advantages and benefits

- NSF H1 registered
- Reduces wear
- Excellent resistance to oxidation and ageing
- Resistant to hot and cold water, water vapour, watery-alkaline and acidic disinfectants and cleaning agents

Branches

- Catering equipment and food processing technology
- Rubber and plastic processing
- Glass and foundry industry
- Rail vehicle technology
- Iron and steel industry
- Plant and machine (tool) engineering
- Chemical industry
- Paper and packaging industry
- Municipal services
- Logistics
- Shipbuilding and marine technology

Application tips

Clean the lubricating points well for optimal effect. Before filling for first time, remove anti-corrosion agent. Fill the bearing such that all functional surfaces are certain of being greased. Fill normal bearings up to about 1/3 of the free space inside the bearing. Low-speed bearings (DN value < 50,000) and their housings should be filled completely. The bearing and machine manufacturer's instructions should be observed. Subsequent lubrication at the lubrication nipples by grease gun or by automatic lubrication system. Assess the lubrication frequency and quantity on basis of service conditions. If old grease cannot be removed, restrict the quantity of grease so as to avoid overlubricating the bearing. If lubrication frequencies tend to be low, you should aim for a full grease change. Only mix with suitable lubricants.

OKS 476

Multipurpose Grease, for Food Processing Technology

Packaging

- 400 ml Cartridge
- 1 kg Can
- 5 kg Hobbock
- 25 kg Hobbock
- 180 kg Drum

Technical data

| | Standard | Conditions | Unit | Value |
|---|------------------------|--------------|--------------------|---|
| Main components | | | | |
| base oil | | | | semi-synthetic oil |
| thickener | | | | aluminium-complex soap |
| Application related technical data | | | | |
| marking | analogue to DIN 51 502 | | | KP2K-30 |
| viscosity (at 40°C) | DIN 51 562-1 | base oil | mm ² /s | 240 |
| viscosity (at 100°C) | DIN 51 562-1 | base oil | mm ² /s | 22 |
| drop point | DIN ISO 2176 | | °C | > 220 |
| consistency | DIN 51 818 | DIN ISO 2137 | NLGI grade | 2 |
| worked penetration | DIN ISO 2137 | 60DH | 0.1 mm | 265-295 |
| lower operating temperature | DIN 51 805 | ≤ 1,400 hPa | °C | -30 |
| upper operating temperature | | | °C | 110 |
| colour | | | | white |
| density (at 20°C) | DIN 51 757 | | g/cm ³ | 0.92 |
| water resistance | DIN 51 807-1 | 3h/90°C | Degree | 1-90 |
| DN value (dm x n) | | | mm/min | 400,000 |
| four-ball test rig welding load | DIN 51 350-4 | | N | 2,200 |
| Properties and approvals | | | | |
| UFI | | | | |
| approval for food processing technology | | | | NSF H1, Reg.-Nr. 137619 |

OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47
 82216 Maisach
 +49 8142 3051 - 500
 info@oks-germany.com
 www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark
Product restricted to professional users. Safety data sheet available for download at www.oks-germany.com
 Our Customer and Technical service will be pleased to help should you have any further questions.