


## OKS 370

### Multipurpose Oil, for Food Processing Technology

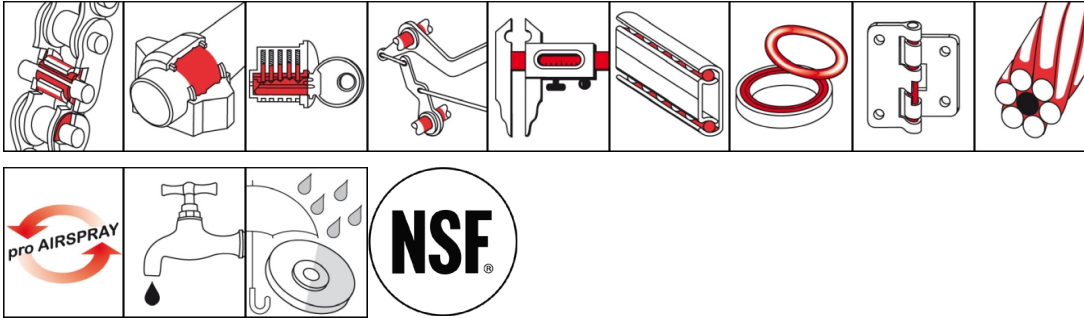

#### Description

Colourless universal oil for food processing technology.

#### Applications

- Lubrication of valve seals, collars, O-rings, drives, piston rods and guides
- Lubrication of slides, slat-band and roller chains
- Lubrication of cutting knives as well as of needles and lifters of knitting machines
- Dismantling of rusted-in parts and removal of oil and greasy soiling

#### Advantages and benefits

- NSF H1, 3H registered
- Highly effective due to good creep properties
- Broad range of uses
- Displaces water
- OKS 370 is suitable for use with the OKS Airspray system
- Also available as spray version OKS 371

#### Branches

- Catering equipment and food processing technology
- Rail vehicle technology
- Rubber and plastic processing
- Iron and steel industry
- Chemical industry
- Shipbuilding and marine technology
- Logistics
- Glass and foundry industry
- Municipal services
- Paper and packaging industry
- Plant and machine (tool) engineering

#### Application tips

Clean the surfaces for optimal effect. Apply OKS 370 with a brush, drip oiler or by immersion or using a suitable automatic lubrication system locations to be lubricated. Avoid excesses. In as far as available, observe the machine manufacturer's instructions. Assess the lubrication frequency and quantity on the basis of the service conditions. Only mix with suitable lubricants.

#### Packaging

- 5 l Canister
- 25 l Canister
- 200 l Drum

## OKS 370

### Multipurpose Oil, for Food Processing Technology

#### Technical data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
base oil				white oil
<b>Application related technical data</b>				
marking				CL 15
viscosity (at 40°C)	DIN 51 562-1		mm²/s	14
viscosity at (100°C)	DIN 51 562-1		mm²/s	3.7
viscosity class	DIN ISO 3448	DIN 51 562-1, 40°C	ISO VG	15
pour point	DIN ISO 3016	3°C step	°C	-18
flashing point	DIN ISO 2592	> 79	°C	195
lower operating temperature			°C	-10
upper operating temperature			°C	180
colour				colourless
density (at 20°C)	DIN EN ISO 3838		g/cm³	0.87
<b>Properties and approvals</b>				
UFI				3TS1-A0AH-X00G-1VFF
approval for food processing technology				<a href="#">NSF H1, 3H, Reg.-Nr. 124382</a>

#### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47

82216 Maisach

+49 8142 3051 - 500

info@oks-germany.com

www.oks-germany.com

a brand of  
**FREUDENBERG**

The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark

**Product restricted to professional users.** Safety data sheet available for download at [www.oks-germany.com](http://www.oks-germany.com)  
Our Customer and Technical service will be pleased to help should you have any further questions.