
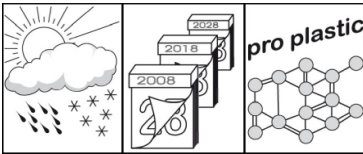


OKS 1105 Isolating Paste



Description

OKS 1105 prevents the formation of electrically conductive layers and minimises the risk of flashovers and dielectric losses. The insulators and switchgear covered with the paste thus maintain a good insulation resistance.

Applications

- Sealing lubrication for electrical or electronic equipment such as relays, plug-in connections, cable lugs and lamp sockets
- Protection of insulators and switchgear in humid atmospheres, for example of junction boxes, screw terminals, overload cutouts at high-voltage pylons, connecting cables and terminal connections
- Lubricant for plastic screw connections and other moving parts of metal, ceramic, plastic

Branches

- Shipbuilding and marine technology
- Plant and machine (tool) engineering
- Logistics
- Iron and steel industry
- Municipal services
- Paper and packaging industry
- Chemical industry
- Rail vehicle technology
- Glass and foundry industry
- Rubber and plastic processing

Advantages and benefits

- Excellent water repellent properties
- Excellent surface wetting
- Good adhesion on glass, porcelain and plastics
- Stable consistency across a wide temperature range
- Very good resistance to chemical and weather-based influences (e.g. ozone, UV radiation)
- Neutral with regard to many materials
- Small change in the dielectric properties across a wide temperature range

Application tips

For optimum effectiveness, clean the point to be protected. Best way is to clean mechanically first and then with OKS 2610/OKS 2611 universal cleaner. Apply OKS 1105 evenly. Avoid excesses. Observe the plant manufacturer's instructions. If the protective layer is saturated with conductive particles, remove these and apply a new coating.

Packaging

- 500 g Can
- 5 kg Hobbock

OKS 1105

Isolating Paste

Technical data

	Standard	Conditions	Unit	Value
Main components				
base oil				polydimethylsiloxane
thickener				inorganic
Application related technical data				
marking	analogue to DIN 51 502			MSI23S-40
drop point	DIN ISO 2176		°C	without
unworked penetration	DIN ISO 2137		0.1 mm	245-275
resistance to oxidation	DIN 51 808	100h/99°C	bar	< 0.3
lower operating temperature			°C	-40
upper operating temperature			°C	200
colour				light-coloured
density (at 20°C)	DIN EN ISO 3838		g/cm ³	1.05
Product specific technical data				
dielectric constant		10 ² - 10 ⁵ Hz		2.75
evaporation loss	DIN 58 397-1	30h, 200°C	percent in weight	< 2.5
dielectric strength	DIN 53 482		kV/mm	approx. 35
specific resistivity	DIN 53 482	25°C	Ω cm	approx. 10 ¹⁴
Properties and approvals				
UFI				

OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47

82216 Maisach

+49 8142 3051 - 500

info@oks-germany.com

www.oks-germany.com

a brand of
FREUDENBERG

The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark
Product restricted to professional users. Safety data sheet available for download at www.oks-germany.com
Our Customer and Technical service will be pleased to help should you have any further questions.