



## OKS 300 MoS<sub>2</sub> Mineral Oil Concentrate

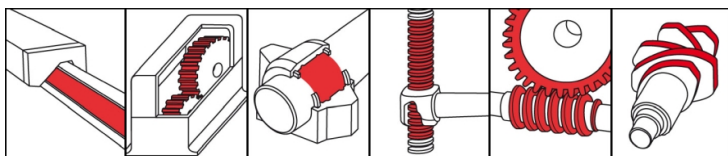

**Mo<sub>x</sub> - Active**

### Description

OKS 300 is a MoS<sub>2</sub>-Mineral Oil Concentrate, an additive to gear, engine and machine oils.

### Applications

- Lubricating oil additive for heavily loaded friction and rolling bearings for increasing the lubricating effect, improving the high-pressure properties and reducing the temperature increase
- Gear oil additive to guard against gearwheel damage Stops pitting and is especially suitable for gearbox designs with a high percentage of sliding
- Engine and compressor oil additive for reduced wear and increased operating safety, as run-in and smoothing lubricant
- Machining oil additive for chip-free or cutting production to increase working speeds and tool life

### Advantages and benefits

- Excellently suited as performance-increasing additive, as additive to bed track oils, engine oils, C/CC oils and slightly alloyed industrial oils
- Highly effective due to finest, homogeneous MoS<sub>2</sub> distribution in the oil
- Broad range of uses with many different oils and alone as a high-performance oil
- Lowest friction due to high lubricating effectiveness of MoS<sub>2</sub>
- Fully stabilised without precipitation, passes through common micro-filters, does not react to magnetic filters

### Branches

- Plant and machine (tool) engineering
- Glass and foundry industry
- Municipal services
- Rail vehicle technology
- Rubber and plastic processing
- Shipbuilding and marine technology
- Logistics
- Paper and packaging industry
- Iron and steel industry
- Chemical industry

### Application tips

Shake or stir well before use. Depending on loading, add 1-2% to engine oils and 5-10% to machine- and gear oils. Instructions of the machine manufacturer have to be observed. Mixing will occur in operation. Only mix with appropriate lubricants. Not suitable with water-based lubricants and polyglycol oils.

## OKS 300 MoS<sub>2</sub> Mineral Oil Concentrate

### Packaging

- 1 l Bottle
- 5 l Canister
- 25 l Canister
- 200 l Drum

### Technical data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
base oil				mineral oil
solid lubricants				MoS <sub>2</sub>
additives				Mo <sub>x</sub> -Active
<b>Application related technical data</b>				
viscosity (at 40°C)	DIN 51 562-1		mm <sup>2</sup> /s	approx. 90
viscosity class	DIN ISO 3448	DIN 51 562-1, 40°C	ISO VG	100
pour point	DIN ISO 3016	3°C step	°C	-30
flashing point	DIN ISO 2592	> 79	°C	230
colour				black
density (at 20°C)	DIN EN ISO 3838		g/cm <sup>3</sup>	0.92
<b>Product specific technical data</b>				
particle size	DIN 51 832		µm	0.3
<b>Properties and approvals</b>				
UFI				

### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47

82216 Maisach

+49 8142 3051 - 500

info@oks-germany.com

www.oks-germany.com

a brand of  
**FREUDENBERG**

The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark  
**Product restricted to professional users.** Safety data sheet available for download at [www.oks-germany.com](http://www.oks-germany.com)  
Our Customer and Technical service will be pleased to help should you have any further questions.