



OKS 8601 BIologic Multi Oil, Spray

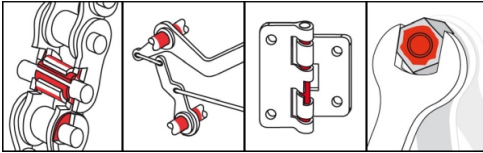

Description

OKS 8601 is a biodegradable multi-oil with highly environmentally friendly ingredients.

Applications

- Lubrication of chains and machine elements operated outdoors
- Multi Oil also at higher temperatures

Branches

- Iron and steel industry
- Rubber and plastic processing
- Shipbuilding and marine technology
- Glass and foundry industry
- Municipal services
- Plant and machine (tool) engineering
- Logistics
- Chemical industry
- Rail vehicle technology
- Paper and packaging industry

Advantages and benefits

- Good lubricating properties
- Good creep capacity
- Biodegradable
- VOC-free
- Can be used up to 160°C
- Silicone-free
- Percentage of renewable raw materials > 90%

Application tips

Clean the surfaces for optimal effect. Spray on evenly OKS 8601 spray. Avoid excesses. In as far as available, when using on plastics and sensitive surfaces check compatibility beforehand. Observe the machine manufacturer's instructions. Assess the lubrication frequency and quantity on the basis of the service conditions. Caution: Only mix with suitable lubricants.

Packaging

- 300 ml Spray

OKS 8601 BIologic Multi Oil, Spray

Technical data

| | Standard | Conditions | Unit | Value |
|---|------------------------|--------------------|--------|-----------------------|
| Main components | | | | |
| base oil | | | | ester |
| Application related technical data | | | | |
| marking | analogue to DIN 51 502 | | | CLX 32 |
| viscosity | DIN 51 562-1 | at 40°C | mm²/s | 35-40 |
| viscosity class | DIN ISO 3448 | DIN 51 562-1, 40°C | ISO VG | 32 |
| flashing point | DIN ISO 2592 | > 79 | °C | 270 |
| lower operating temperature | | | °C | -5 |
| upper operating temperature | | | °C | 160 |
| colour | | | | yellowish-light brown |
| density | DIN EN ISO 3838 | at 20°C | g/cm³ | 0.94 |
| Product specific technical data | | | | |
| biodegradability | CEC-L-33-T-82 | 21 days | % | > 90 |
| Properties and approvals | | | | |
| UFI | | | | ROU1-E003-700E-9NMC |

OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47

82216 Maisach

+49 8142 3051 - 500

info@oks-germany.com

www.oks-germany.com

a brand of
FREUDENBERG

The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark

Product restricted to professional users. Safety data sheet available for download at www.oks-germany.com
Our Customer and Technical service will be pleased to help should you have any further questions.