


## OKS 3720

### Gear Oil, ISO VG 220

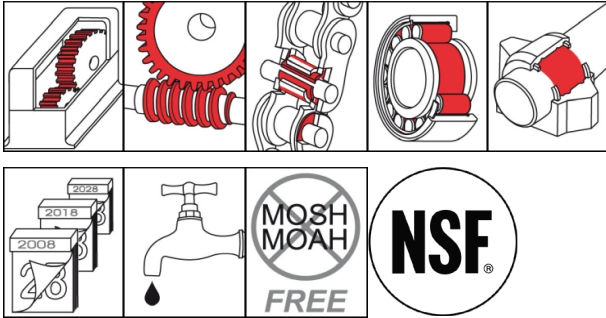

#### Description

Fully synthetic oil of the ISO VG class 220 for lubricating gears and other machine elements in the food processing technology.

#### Applications

- Lubrication of closed toothed gearin
- Liquid lubrication of chains, joints, guides, rolling and friction bearings
- Suitable for immersion-bath, immersion-bath circulation and injection lubrication

#### Branches

- Catering equipment and food processing technology
- Plant and machine (tool) engineering
- Logistics
- Shipbuilding and marine technology
- Paper and packaging industry
- Glass and foundry industry
- Rail vehicle technology
- Chemical industry
- Municipal services
- Iron and steel industry
- Rubber and plastic processing

#### Advantages and benefits

- NSF H1-registered
- Good ageing and oxidation stability through optimal additives
- Cold and hot water resistant
- Resistant to water steam, disinfectants and cleaning agents
- Wide operating temperature range
- Shear-stable and low-foaming
- Good wear protection
- Good corrosion protection
- Long economic operating times
- MOSH/MOAH-free (as per recipe)

#### Application tips

Clean the lubricating point thoroughly for optimal effect. Before filling gears for first time, remove anti-corrosion agent. Fill the gears so that the immersing teeth transport the lubricant reliably. Apply a sufficient amount of lubricant with a brush, drip oiler, by immersion or using a suitable automatic lubrication system. Observe the gear and machine manufacturer's instructions. Assess the lubrication frequency and quantity on basis of service conditions. Only mix with suitable lubricants.

#### Packaging

- 5 l Canister
- 25 l Canister
- 200 l Drum

# OKS 3720

## Gear Oil, ISO VG 220

### Technical data

|                                           | Standard          | Conditions          | Unit         | Value                                  |
|-------------------------------------------|-------------------|---------------------|--------------|----------------------------------------|
| <b>Main components</b>                    |                   |                     |              |                                        |
| base oil                                  |                   |                     |              | synthetic oil mixture                  |
| <b>Application related technical data</b> |                   |                     |              |                                        |
| marking                                   | DIN 51 502        | DIN 51 825          |              | CLP HC 220                             |
| viscosity (at 40°C)                       | DIN 51 562-1      |                     | mm²/s        | 220                                    |
| viscosity at (100°C)                      | DIN 51 562-1      |                     | mm²/s        | 26                                     |
| viscosity index                           | DIN ISO 2909      |                     |              | > 140                                  |
| viscosity class                           | DIN ISO 3448      | DIN 51 562-1, 40°C  | ISO VG       | 220                                    |
| pour point                                | DIN ISO 3016      | 3°C step            | °C           | < -30                                  |
| flashing point                            | DIN ISO 2592      | > 79, open crucible | °C           | 200                                    |
| lower operating temperature               |                   |                     | °C           | -30                                    |
| upper operating temperature               |                   |                     | °C           | 120                                    |
| colour                                    |                   |                     |              | colourless-yellow                      |
| density (at 20°C)                         | DIN 51 757        |                     | g/cm³        | 0.86                                   |
| SKF-EMCOR Copper                          | DIN EN ISO 2160   | 24h, 100°C          | corr. degree | 1-100                                  |
| FZG wear protection test                  | DIN ISO 14 635-01 | A/8,3/90            | power level  | > 12                                   |
| <b>Product specific technical data</b>    |                   |                     |              |                                        |
| Corrosion Protection_Steel                | DIN ISO 7120      | 24h, 60°C           |              | no rust                                |
| <b>Properties and approvals</b>           |                   |                     |              |                                        |
| UFI                                       |                   |                     |              |                                        |
| approval for food processing technology   |                   |                     |              | <a href="#">NSF H1_Reg.-Nr. 135752</a> |

### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47

82216 Maisach

+49 8142 3051 - 500

info@oks-germany.com

www.oks-germany.com

a brand of  
 **FREUDENBERG**

The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark  
**Product restricted to professional users.** Safety data sheet available for download at [www.oks-germany.com](http://www.oks-germany.com)  
Our Customer and Technical service will be pleased to help should you have any further questions.