
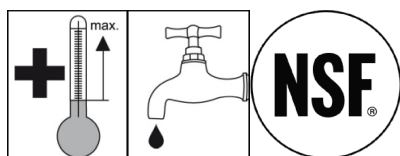


## OKS 479

### High-Temperature Grease, for Food Processing Technology

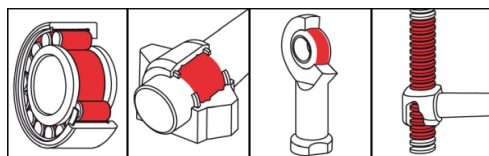

#### Description

OKS 479 is a fully synthetic grease for food processing technology that is used to lubricate rolling and friction bearings as well as other machine elements under increased operating temperatures.

#### Applications

- Lubrication of rolling and friction bearings, joints, linear drives, guides
- For the lubrication of fittings, seals, moulded parts and elements of elastic rubber materials in the hot- and cold-water segment

#### Branches

- Catering equipment and food processing technology
- Chemical industry
- Plant and machine (tool) engineering
- Paper and packaging industry
- Glass and foundry industry
- Iron and steel industry
- Rail vehicle technology
- Shipbuilding and marine technology
- Rubber and plastic processing
- Logistics
- Municipal services

#### Advantages and benefits

- NSF H1 registered
- Can be used universally due to good high-temperature properties, long-term lubricating effect and good adhesive strength on metal surfaces
- Resistant to hot and cold water, water vapour, watery-alkaline and acidic disinfectants and cleaning agents
- High resistance to oxidation and ageing

#### Application tips

Clean the lubricating points well for optimal effect. Before filling for first time, remove anti-corrosion agent. Fill the bearing such that all functional surfaces are certain of being greased. Fill normal bearings up to about 1/3 of the free space inside the bearing. Low-speed bearings (DN value below 50,000) and their housings should be filled completely. In as far as available, the bearing and machine manufacturer's instructions should be observed. Subsequent lubrication at the lubrication nipples by grease gun or by automatic lubrication system. Assess the lubrication frequency and quantity on the basis of the service conditions. If old grease cannot be removed, restrict the quantity of grease so as to avoid over-lubricating the bearing. If lubrication frequencies tend to be low, you should aim for a full grease change. Caution: Only mix with suitable lubricants.

## OKS 479

### High-Temperature Grease, for Food Processing Technology

#### Packaging

- 400 ml Cartridge
- 1 kg Can
- 5 kg Hobbock
- 25 kg Hobbock

#### Technical data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
base oil				polyalphaolefine
thickener				aluminium-complex soap
<b>Application related technical data</b>				
marking	analogue to DIN 51 502	DIN 51 825		KPHC1K-30
Viscosity base oil	DIN 51 562-1	at 40°C	mm <sup>2</sup> /s	360
Viscosity base oil	DIN 51 562-1	at 100°C	mm <sup>2</sup> /s	37
drop point	DIN ISO 2176		°C	> 230
consistency	DIN 51 818	DIN ISO 2137	NLGI grade	1
worked penetration	DIN ISO 2137	60DH	0.1 mm	310-340
lower operating temperature	DIN 51 805	≤ 1,400 hPa	°C	-35
upper operating temperature	DIN 51 821-2	F50 (A/1500/6000), > 100h	°C	120
upper operating temperature		For a short time	°C	160
colour				beige
density	DIN EN ISO 3838	at 20°C	g/cm <sup>3</sup>	0.9
water resistance	DIN 51 807-1	3h/90°C	Degree	1-90
DN value (dm x n)			mm/min	500,000
four-ball test rig welding load	DIN 51 350-4		N	2,200
SKF-EMCOR	DIN 51 802	7 days, distilled water	corr. degree	1
<b>Properties and approvals</b>				
UFI				MG0J-10EH-P00D-8DXW
approval for food processing technology				<a href="#">NSF H1, Reg.-Nr. 135675</a>

**Klüber Lubrication München GmbH & Co. KG**  
Geisenhausenerstraße 7 / 81379 München /  
Germany / phone +49 89 7876-0

The data in this document is based on our general experience and knowledge at the time of publication and is intended to give information of possible applications to a reader with technical experience. It constitutes neither an assurance of product properties nor does it release the user from the obligation of performing preliminary field tests with the product selected for a specific application. All data are guide values which depend on the lubricant's composition, the intended use and the application method. The technical values of lubricants change depending on the mechanical, dynamical, chemical and thermal loads, time and pressure. These changes may affect the function of a component. We recommend contacting us to discuss your specific application. If possible we will be pleased to provide a sample for testing on request. Klüber products are continually improved. Therefore, Klüber Lubrication reserves the right to change all the technical data in this document at any time without notice.