



PRODUCT INFORMATION

a product brand of KLÜBER LUBRICATION

OKS 481

High-Pressure Grease, water-resistant, for Food Processing Technology, Spray

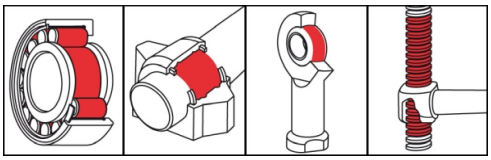

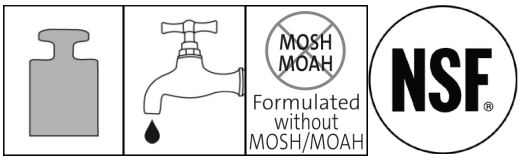

Description

Fully synthetic calcium sulphonate complex grease for high loads and pressures at applications in the complete food processing technology.

Applications

- Rolling and friction bearing lubrication, even at high temperatures
- Lubrication for bearings with contact to cleaning agents or disinfectants
- For mechanical units such as levers, joints and hinges, also under strong water effect

Branches

- Catering equipment and food processing technology
- Rubber and plastic processing
- Chemical industry
- Shipbuilding and marine technology
- Plant and machine (tool) engineering
- Municipal services
- Paper and packaging industry
- Logistics
- Iron and steel industry
- Glass and foundry industry
- Rail vehicle technology

Advantages and benefits

- NSF H1 registered (OKS 480 & OKS 481)
- High shear stability prevents thinning out of the grease under extreme mechanical loads such as during vibrations
- Excellent wear protection and very good high-pressure properties
- The calcium sulphonate complex soap ensures excellent water resistance and very good corrosion protection
- Broad temperature application range (-30°C to +160°C)
- High temperature and oxidation stability through fully synthetic base oil
- Very high resistance to water-alkaline or acidic disinfectants and cleaning agents
- Formulated without MOSH/MOAH

Application tips

Clean the surfaces for optimal effect. Before filling for first time, remove anti-corrosion agent. Fill the bearing such that all functional surfaces are certain of being greased. Fill normal bearings up to about 1/3 of the free space inside the bearing. Low-speed bearings (DN value below 50,000) and their housings should be filled completely. The bearing and machine manufacturer's instructions should be observed. Subsequent lubrication at the lubrication nipples by grease gun or by automatic lubrication systems Assess the lubrication frequency and quantity on basis of service conditions. If old grease cannot be removed, restrict the quantity of grease so as to avoid over-lubricating the bearing. If lubrication frequencies tend to be low, you should aim for a full grease change. Only mix with suitable lubricants.

© Klüber Lubrication München GmbH & Co. KG

a product brand of KLÜBER LUBRICATION

OKS 481

High-Pressure Grease, water-resistant, for Food Processing Technology, Spray

Packaging

- 400 ml Spray

Technical data

	Standard	Conditions	Unit	Value
Main components				
base oil				polyalphaolefine
thickener				calcium sulphonate complex soap
Application related technical data				
marking	analogue to DIN 51 502			KPHC2P-30
Viscosity base oil	DIN 51 562-1	at 40°C	mm²/s	100
Viscosity base oil	DIN 51 562-1	at 100°C	mm²/s	14.7
drop point	ASTM D2265		°C	> 300
consistency	DIN 51 818	DIN ISO 2137	NLGI grade	2
worked penetration	DIN ISO 2137	60DH	0.1 mm	265-295
lower operating temperature			°C	-30
upper operating temperature			°C	160
colour				beige
density	DIN EN ISO 3838	at 20°C	g/cm³	0.65
DN value (dm x n)			mm/min	400,000
four-ball test rig welding load	DIN 51 350-4		N	4,000
Properties and approvals				
UFI				WEX1-N0KY-G007-R9WX
approval for food processing technology				NSF H1, Reg.-Nr. 153878

Klüber Lubrication München GmbH & Co. KG
Geisenhausenerstraße 7 / 81379 München / Germany / phone +49 89 7876-0

The data in this document is based on our general experience and knowledge at the time of publication and is intended to give information of possible applications to a reader with technical experience. It constitutes neither an assurance of product properties nor does it release the user from the obligation of performing preliminary field tests with the product selected for a specific application. All data are guide values which depend on the lubricant's composition, the intended use and the application method. The technical values of lubricants change depending on the mechanical, dynamical, chemical and thermal loads, time and pressure. These changes may affect the function of a component. We recommend contacting us to discuss your specific application. If possible we will be pleased to provide a sample for testing on request. Klüber products are continually improved. Therefore, Klüber Lubrication reserves the right to change all the technical data in this document at any time without notice.

© Klüber Lubrication München GmbH & Co. KG