


OKS 100

MoS₂ Powder, high degree of purity

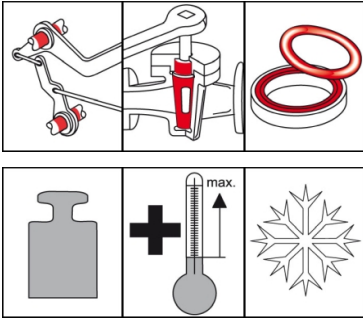

Description

OKS 100 is a MoS₂-powder to improve the sliding properties of machine elements.

Applications

- For sliding properties improvement of machine parts, apparatuses and precision machinery, e.g. under the influence of oxygen, in vacuum or radioactive radiation
- Dry lubrication for tools or workpieces in cold- and thermoforming
- For incorporation in plastics, sealings, packages, sintered metals and improvement of sliding properties
- For long-term or possibly lifetime-lubrication

Advantages and benefits

- Reduces friction and wear in a wide temperature range
- High effectiveness due to high affinity of MoS₂ to metals
- Low friction at highest load capacities
- Low consumption based on forming of extreme thin sliding films
- Not electrically conducting and not magnetic
- Chemically stable except against halogenated gases, concentrated sulfuric- and nitric acid

Branches

- Rail vehicle technology
- Municipal services
- Rubber and plastic processing
- Iron and steel industry
- Glass and foundry industry
- Chemical industry
- Logistics
- Shipbuilding and marine technology
- Plant and machine (tool) engineering
- Paper and packaging industry

Application tips

For best adhesion, clean sliding surfaces. Best way is to clean mechanically first and then with OKS 2610 or OKS 2611 universal cleaner. Apply on small parts in series production by tumbling, under addition of small amounts powder and tumbling parts, until a complete MoS₂ film is formed. Brush the powder onto bigger surfaces. Addition of approx. 2-3% for self-lubricating material before forming.

Packaging

- 250 g Can
- 1 kg Can
- 5 kg Hobbock
- 25 kg Hobbock

OKS 100

MoS₂ Powder, high degree of purity

Technical data

	Standard	Conditions	Unit	Value
Main components				
solid lubricants				MoS ₂
share of solid lubricants	DIN 51 814		percent in weight	> 98.5
Application related technical data				
lower operating temperature			°C	-185
maximal operating temperature		in normal atmosphere	°C	450
maximal operating temperature		in vacuum	°C	1,100
maximal operating temperature		in inert gas	°C	1,300
colour				grey-black
density		at 20°C	g/cm ³	4.8
Product specific technical data				
particle size	ISO 13320-1	d 50	µm	12.0-30.0
particle size		max. d 99	µm	max. 150

Klüber Lubrication München GmbH & Co. KG
Geisenhausenerstraße 7 / 81379 München /
Germany / phone +49 89 7876-0

The data in this document is based on our general experience and knowledge at the time of publication and is intended to give information of possible applications to a reader with technical experience. It constitutes neither an assurance of product properties nor does it release the user from the obligation of performing preliminary field tests with the product selected for a specific application. All data are guide values which depend on the lubricant's composition, the intended use and the application method. The technical values of lubricants change depending on the mechanical, dynamical, chemical and thermal loads, time and pressure. These changes may affect the function of a component. We recommend contacting us to discuss your specific application. If possible we will be pleased to provide a sample for testing on request. Klüber products are continually improved. Therefore, Klüber Lubrication reserves the right to change all the technical data in this document at any time without notice.