


## OKS 611

### MoS<sub>2</sub>-Rust Remover, Spray

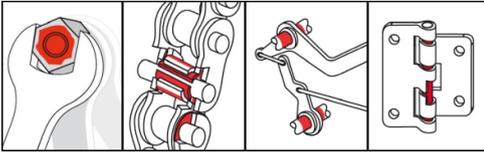

#### Description

OKS 611 is a universal rust dissolver with molybdenum disulphide for industry, workshop and maintenance applications.

#### Applications

- Loosening of rusted-on connections such as screws, nuts, levers, joints or locks
- Non-destructive disassembly of seized or rusted-in parts such as bolts, chain links, springs, valves or hinges

#### Branches

- Iron and steel industry
- Glass and foundry industry
- Shipbuilding and marine technology
- Rubber and plastic processing
- Municipal services
- Rail vehicle technology
- Plant and machine (tool) engineering
- Chemical industry
- Logistics
- Maintenance and servicing
- Paper and packaging industry

#### Advantages and benefits

- High effectiveness thanks to gap penetration properties
- Minimizing of the effort required to loosen seized parts and restoring of mobility
- Good lubricating properties thanks to MoS<sub>2</sub>
- Loosened parts are protected against new corrosion forming
- Eliminates squeaking noises
- Displaces moisture

#### Application tips

For optimum effectiveness, first clean contamination away from surface mechanically. Spray on generously. Allow to work in for time corresponding to depth of penetration required. If necessary, repeat the treatment several times. Lubrication in adequate quantity. Remove any excess. Only mix with suitable lubricants.

#### Packaging

- 400 ml Spray

# PRODUCT INFORMATION



## OKS 611

### MoS<sub>2</sub>-Rust Remover, Spray

**KLÜBER**  
a product brand of LUBRICATION

#### Technical data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
base oil				mineral oil
solid lubricants				MoS <sub>2</sub>
<b>Application related technical data</b>				
viscosity	DIN 51 562-1	40°C, with solvent	mm <sup>2</sup> /s	> 3
lower operating temperature			°C	-30
upper operating temperature		with solvent	°C	60
upper operating temperature		after evaporation of the solvent	°C	150
colour				green-black
density	DIN EN ISO 3838	at 20°C	g/cm <sup>3</sup>	0.68
<b>Properties and approvals</b>				
UFI				KRN1-HOVV-J007-XU2E

**Klüber Lubrication München GmbH & Co. KG**  
Geisenhausenerstraße 7 / 81379 München /  
Germany / phone +49 89 7876-0

The data in this document is based on our general experience and knowledge at the time of publication and is intended to give information of possible applications to a reader with technical experience. It constitutes neither an assurance of product properties nor does it release the user from the obligation of performing preliminary field tests with the product selected for a specific application. All data are guide values which depend on the lubricant's composition, the intended use and the application method. The technical values of lubricants change depending on the mechanical, dynamical, chemical and thermal loads, time and pressure. These changes may affect the function of a component. We recommend contacting us to discuss your specific application. If possible we will be pleased to provide a sample for testing on request. Klüber products are continually improved. Therefore, Klüber Lubrication reserves the right to change all the technical data in this document at any time without notice.