


## OKS 480

### High-Pressure Grease, water-resistant, for Food Processing Technology

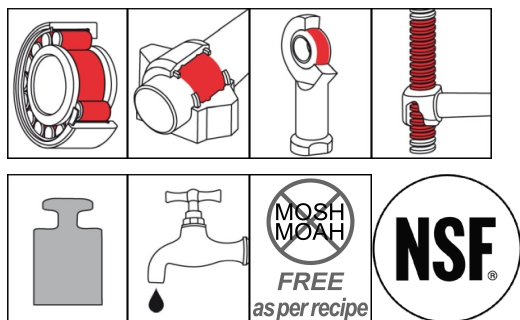

#### Description

Fully synthetic calcium sulphonate complex grease for high loads and pressures at applications in the complete food processing technology.

#### Applications

- Rolling and friction bearing lubrication, even at high temperatures
- Lubrication for bearings with contact to cleaning agents or disinfectants
- For mechanical units such as levers, joints and hinges, also under strong water effect

#### Branches

- Catering equipment and food processing technology
- Chemical industry
- Municipal services
- Shipbuilding and marine technology
- Plant and machine (tool) engineering
- Logistics
- Paper and packaging industry
- Rail vehicle technology
- Iron and steel industry
- Rubber and plastic processing
- Glass and foundry industry

#### Advantages and benefits

- NSF H1 registered
- High shear stability prevents thinning out of the grease under extreme mechanical loads such as during vibrations
- Excellent wear protection and very good high-pressure properties
- The calcium sulphonate complex soap ensures excellent water resistance and very good corrosion protection
- Broad temperature application range (-30°C to +160°C)
- High temperature and oxidation stability through fully synthetic base oil
- Very high resistance to water-alkaline or acidic disinfectants and cleaning agents
- Also available as spray version OKS 481
- MOSH/MOAH-free (as per recipe)

#### Application tips

Clean the lubricating points well for optimal effect. Before filling for first time, remove anti-corrosion agent. Fill the bearing such that all functional surfaces are certain of being greased. Fill normal bearings up to about 1/3 of the free space inside the bearing. Low-speed bearings (DN value below 50,000) and their housings should be filled completely. The bearing and machine manufacturer's instructions should be observed. Subsequent lubrication at the lubrication nipples by grease gun or by automatic lubrication system. Assess the lubrication frequency and quantity on the basis of the service conditions. If old grease cannot be removed, restrict the quantity of grease so as to avoid over-lubricating the bearing. If lubrication frequencies tend to be low, you should aim for a full grease change. Only mix with suitable lubricants.

# OKS 480

## High-Pressure Grease, water-resistant, for Food Processing Technology

### Packaging

- 400 ml Cartridge
- 1 kg Can
- 5 kg Hobbock
- 25 kg Hobbock

### Technical data

|                                           | Standard               | Conditions   | Unit               | Value                                   |
|-------------------------------------------|------------------------|--------------|--------------------|-----------------------------------------|
| <b>Main components</b>                    |                        |              |                    |                                         |
| base oil                                  |                        |              |                    | polyalphaolefine                        |
| thickener                                 |                        |              |                    | calcium sulphonate complex soap         |
| <b>Application related technical data</b> |                        |              |                    |                                         |
| marking                                   | analogue to DIN 51 502 |              |                    | KPHC2P-30                               |
| Viscosity base oil                        | DIN 51 562-1           | at 40°C      | mm <sup>2</sup> /s | 100                                     |
| Viscosity base oil                        | DIN 51 562-1           | at 100°C     | mm <sup>2</sup> /s | 14.7                                    |
| drop point                                | ASTM D2265             |              | °C                 | > 300                                   |
| consistency                               | DIN 51 818             | DIN ISO 2137 | NLGI grade         | 2                                       |
| worked penetration                        | DIN ISO 2137           | 60DH         | 0.1 mm             | 265-295                                 |
| lower operating temperature               |                        |              | °C                 | -30                                     |
| upper operating temperature               |                        |              | °C                 | 160                                     |
| colour                                    |                        |              |                    | beige                                   |
| density                                   | DIN EN ISO 3838        | at 20°C      | g/cm <sup>3</sup>  | 0.99                                    |
| DN value (dm x n)                         |                        |              | mm/min             | 400,000                                 |
| four-ball test rig welding load           | DIN 51 350-4           |              | N                  | 4,000                                   |
| <b>Properties and approvals</b>           |                        |              |                    |                                         |
| UFI                                       |                        |              |                    | QMJJ-M0GX-Q002-WG9J                     |
| approval for food processing technology   |                        |              |                    | <a href="#">NSF H1, Reg.-Nr. 148971</a> |

**Klüber Lubrication München GmbH & Co. KG**  
 Geisenhausenerstraße 7 / 81379 München /  
 Germany / phone +49 89 7876-0

The data in this document is based on our general experience and knowledge at the time of publication and is intended to give information of possible applications to a reader with technical experience. It constitutes neither an assurance of product properties nor does it release the user from the obligation of performing preliminary field tests with the product selected for a specific application. All data are guide values which depend on the lubricant's composition, the intended use and the application method. The technical values of lubricants change depending on the mechanical, dynamical, chemical and thermal loads, time and pressure. These changes may affect the function of a component. We recommend contacting us to discuss your specific application. If possible we will be pleased to provide a sample for testing on request. Klüber products are continually improved. Therefore, Klüber Lubrication reserves the right to change all the technical data in this document at any time without notice.