
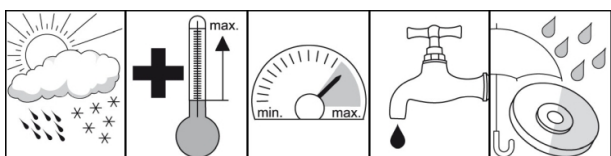


OKS 341 Chain Protector, highly adhesive, Spray

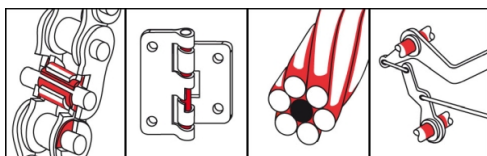

Mo_x-Active

Description

Synthetic lubricant for indoor and outdoor machine elements subjected to high pressure or corrosive influences.

Applications

- Lubrication of fast-running drive chains of all designs for open or semi-open operation without a permanent re-lubricating device, such as motorcycle and bicycle chains
- Lubrication of hoisting chains such as multirow roller chains or stacker truck chains, as well as single or multiple flat-link articulated chains

Branches

- Glass and foundry industry
- Logistics
- Chemical industry
- Rail vehicle technology
- Paper and packaging industry
- Rubber and plastic processing
- Shipbuilding and marine technology
- Iron and steel industry
- Municipal services
- Plant and machine (tool) engineering

Advantages and benefits

- Highly effective due to outstanding creep and gap penetration properties
- Extreme adhesive strength
- Extreme wear protection through Mo_x-Active additive
- Very high resistance to cold and hot water as well as to saline solutions
- Excellent corrosion protection
- O-ring neutral

Application tips

For best adhesion, clean the surfaces mechanically first and then with OKS 2610/OKS 2611 universal cleaner. Spray on evenly OKS 341 spray. Allow excess to drip off and wait for lubricant to penetrate before resuming operation. Observe the machine manufacturer's instructions. Assess the lubrication frequencies and quantities on basis of service conditions, avoid excesses. Only mix with suitable lubricants.

Packaging

- 400 ml Spray

OKS 341

Chain Protector, highly adhesive, Spray

Technical data

| | Standard | Conditions | Unit | Value |
|---|-----------------|--------------------|--------------------|-------------------------|
| Main components | | | | |
| base oil | | | | polyisobutylene |
| additives | | | | adhesion improver |
| additives | | | | Mo _x -Active |
| Application related technical data | | | | |
| marking | DIN 51 502 | | | CLP X 460 |
| viscosity | DIN 51 562-1 | at 40°C | mm ² /s | 440 |
| viscosity class | DIN ISO 3448 | DIN 51 562-1, 40°C | ISO VG | 460 |
| flashing point | DIN ISO 2592 | > 79 | °C | > 200 |
| lower operating temperature | | | °C | -30 |
| upper operating temperature | | | °C | 180 |
| colour | | | | greenish |
| density | DIN EN ISO 3838 | at 20°C | g/cm ³ | 0.67 |
| four-ball test rig welding load | DIN 51 350-2 | | N | 2,600 |
| Properties and approvals | | | | |
| UFI | | | | 0W21-80A9-U009-CTV0 |

Klüber Lubrication München GmbH & Co. KG
Geisenhausenerstraße 7 / 81379 München /
Germany / phone +49 89 7876-0

The data in this document is based on our general experience and knowledge at the time of publication and is intended to give information of possible applications to a reader with technical experience. It constitutes neither an assurance of product properties nor does it release the user from the obligation of performing preliminary field tests with the product selected for a specific application. All data are guide values which depend on the lubricant's composition, the intended use and the application method. The technical values of lubricants change depending on the mechanical, dynamical, chemical and thermal loads, time and pressure. These changes may affect the function of a component. We recommend contacting us to discuss your specific application. If possible we will be pleased to provide a sample for testing on request. Klüber products are continually improved. Therefore, Klüber Lubrication reserves the right to change all the technical data in this document at any time without notice.