


## OKS 451 Chain and Adhesive Lubricant, Spray

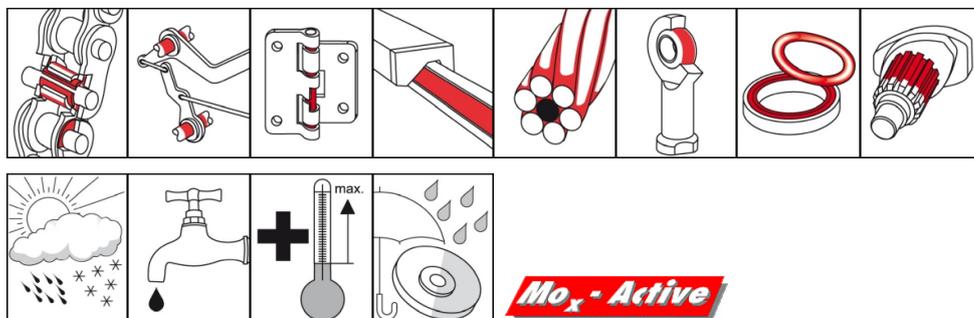

### Description

Fully synthetic adhesive lubricant for the lubrication of fast-running chains and machine elements indoors and outdoors that are subjected to high loads or corrosive influences.

### Applications

- Driving and conveyor chains of all designs in open or semi-enclosed operation without a re-lubrication device
- Roller chains such as motorcycle and bicycle chains
- Stacker truck chains as well as single or multiple flat-link articulated chains without a re-lubrication device
- Rope drives and wire pulls; for example, standing, hoisting, traction or winch ropes in hoisting gears, elevators, lifts or mountain railways
- Flexible drives, bowden and spring cables
- Moving machine parts exposed to outdoor weathering, such as toothed gearing, guides, closing mechanisms, hinges or sliding surfaces

### Advantages and benefits

- Highly effective due to outstanding creep and gap penetration properties
- Highly adhesive and resistant to throwing off
- Contains Mo<sub>x</sub>-Active for increased performance
- Excellent wear protection
- Very good resistance to cold and hot water as well as to saline solutions
- Excellent corrosion protection
- O-ring neutral
- Duolabel

### Branches

- Rail vehicle technology
- Shipbuilding and marine technology
- Glass and foundry industry
- Rubber and plastic processing
- Iron and steel industry
- Plant and machine (tool) engineering
- Chemical industry
- Logistics
- Paper and packaging industry
- Municipal services

### Application tips

For best adhesion, clean the surfaces. Best way is to clean mechanically first and then with OKS 2610/OKS 2611 universal cleaner. Spray on evenly OKS 451 spray. Allow excess to drip off and wait for lubricant to penetrate before resuming operation. In as far as available, observe the machine manufacturer's instructions. Assess the lubrication frequency and quantity on basis of service conditions, avoid excessive lubrication. Only mix with suitable lubricants.

# OKS 451

## Chain and Adhesive Lubricant, Spray

### Packaging

- 400 ml Spray

### Technical data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
base oil				synthetic oil mixture
additives				adhesion improver
additives				Mo <sub>x</sub> -Active
<b>Application related technical data</b>				
marking	DIN 51 502			CLP X 320
viscosity	DIN 51 562-1	at 40°C	mm <sup>2</sup> /s	300
viscosity class	DIN ISO 3448	DIN 51 562-1, 40°C	ISO VG	320
flashing point	DIN EN 22 719	> 79	°C	164
lower operating temperature			°C	-30
upper operating temperature			°C	200
colour				brown-transparent
density	DIN EN ISO 3838	at 20°C	g/cm <sup>3</sup>	0.67
four-ball test rig welding load	DIN 51 350-2		N	2,400
<b>Properties and approvals</b>				
UFI				VXD1-G02R-P006-RS1J

**Klüber Lubrication München GmbH & Co. KG**  
Geisenhausenerstraße 7 / 81379 München /  
Germany / phone +49 89 7876-0

The data in this document is based on our general experience and knowledge at the time of publication and is intended to give information of possible applications to a reader with technical experience. It constitutes neither an assurance of product properties nor does it release the user from the obligation of performing preliminary field tests with the product selected for a specific application. All data are guide values which depend on the lubricant's composition, the intended use and the application method. The technical values of lubricants change depending on the mechanical, dynamical, chemical and thermal loads, time and pressure. These changes may affect the function of a component. We recommend contacting us to discuss your specific application. If possible we will be pleased to provide a sample for testing on request. Klüber products are continually improved. Therefore, Klüber Lubrication reserves the right to change all the technical data in this document at any time without notice.