


OKS 387 Graphite High-Temperature Lubricating Oil

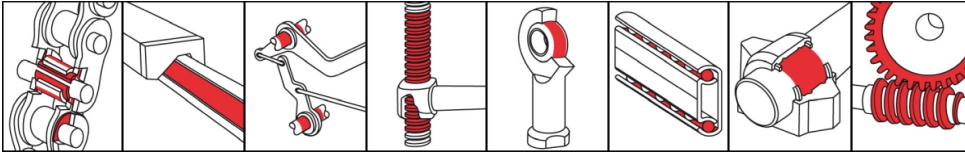

Description

OKS 387 is a high-temperature chain lubricant with graphite for strongly loaded lubrication points at extreme temperatures.

Applications

- Lubrication of highly stressed chains, joints or slideways at higher temperatures
- For conveying systems running beneath radiated heat, in baking and drying lines in the foodstuffs industry
- Dry lubrication at operating temperatures above 200°C
- The synthetic oil content evaporates odorlessly without leaving residues, while the solid lubricant content are left behind to carry out dry lubrication

Branches

- Catering equipment and food processing technology
- Glass and foundry industry
- Iron and steel industry
- Logistics
- Rubber and plastic processing
- Rail vehicle technology
- Shipbuilding and marine technology
- Chemical industry
- Municipal services
- Paper and packaging industry
- Plant and machine (tool) engineering

Application tips

For best results, clean the surfaces. Best way is to clean mechanically first and then with OKS 2610 or OKS 2611 universal cleaner. With a brush, drip oiler or by immersion or using a suitable automatic lubrication system, apply a sufficient quantity to the locations to be lubricated. If at all possible, avoid excess. The manufacturer's instructions should be observed. Assess the lubrication frequency and quantity on basis of service conditions. Only mix with suitable lubricants.

Packaging

- 5 l Canister
- 25 l Canister

Advantages and benefits

- Highly suitable as a high-temperature lubricant
- Highly effective due to homogeneous distribution of the finest graphite throughout the oil
- Versatile application as a liquid lubricant under high temperature conditions
- Resistant to water, chemicals, fuels, lubricants, and hydraulic oils
- NSF H1 registered
- MOSH/MOAH-free (as per recipe)

OKS 387

Graphite High-Temperature Lubricating Oil

Technical data

| | Standard | Conditions | Unit | Value |
|---|-----------------|--------------------|--------------------|---|
| Main components | | | | |
| base oil | | | | polyglycol |
| solid lubricants | | | | graphite |
| Application related technical data | | | | |
| viscosity | DIN 51 562-1 | at 40°C | mm ² /s | 170 |
| viscosity | DIN 51 562-1 | at 100°C | mm ² /s | 36.6 |
| viscosity index | DIN ISO 2909 | | | 265 |
| viscosity class | DIN ISO 3448 | DIN 51 562-1, 40°C | ISO VG | 220 |
| flashing point | DIN ISO 2592 | > 79 | °C | 240 |
| upper operating temperature | | liquid lubrication | °C | 150 |
| maximal operating temperature | | dry lubrication | °C | 600 |
| colour | | | | black |
| density | DIN EN ISO 3838 | at 20°C | g/cm ³ | 1.04 |
| four-ball test rig welding load | DIN 51 350-2 | | N | 2,800 |
| four-ball test rig wear | DIN 51 350-3 | | mm | 3.8 |
| Properties and approvals | | | | |
| approval for food processing technology | | | | NSF H1, Reg.-Nr. 126583 |

Klüber Lubrication München GmbH & Co. KG
Geisenhausenerstraße 7 / 81379 München /
Germany / phone +49 89 7876-0

The data in this document is based on our general experience and knowledge at the time of publication and is intended to give information of possible applications to a reader with technical experience. It constitutes neither an assurance of product properties nor does it release the user from the obligation of performing preliminary field tests with the product selected for a specific application. All data are guide values which depend on the lubricant's composition, the intended use and the application method. The technical values of lubricants change depending on the mechanical, dynamical, chemical and thermal loads, time and pressure. These changes may affect the function of a component. We recommend contacting us to discuss your specific application. If possible we will be pleased to provide a sample for testing on request. Klüber products are continually improved. Therefore, Klüber Lubrication reserves the right to change all the technical data in this document at any time without notice.