


## OKS 2571 Aluminium Protection, Spray

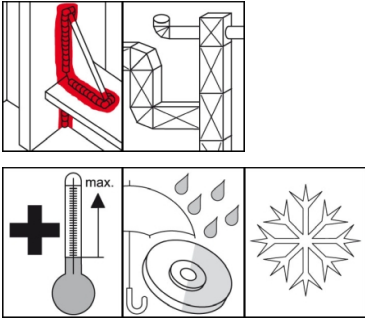

### Description

Corrosion protection for ferrous metals and coating for other materials based on high-purity aluminium powder with active cathodic corrosion protection.

### Applications

- Coating of pipelines and air ducts, containers, exhaust systems, silencers, firing, boiler and heating systems and light-metal bodies on utility vehicles
- Repairs to mechanically (stone impact) or chemically (de-icing salt) damaged aluminium rims
- Shielding of non-metallic materials, e.g. cardboard, wood, glass, plastics and similar
- Finish coat for zinc dust paints such as OKS 2551

### Branches

- Plant and machine (tool) engineering
- Glass and foundry industry
- Rubber and plastic processing
- Chemical industry
- Rail vehicle technology
- Municipal services
- Iron and steel industry
- Paper and packaging industry
- Maintenance and servicing
- Logistics
- Shipbuilding and marine technology

### Advantages and benefits

- Enduring corrosion protection with active cathodic corrosion protection
- Self-healing polymer layer which closes again after slight damage and prevents corrosion
- Suitable for corrosion protection up to Category C3H as per EN ISO 12944:2018-06 for industrial and urban areas and coastal areas with low salt levels
- Finish coat, e.g. for a prime coat with OKS 2551
- Universal protective and decorative coating for many materials

### Application tips

Clean the surfaces for optimum adhesion. It is best to clean mechanically first and then with OKS 2610 or OKS 2611 universal cleaner. The surface to be treated must be dry, uncoated and free of grease. Shake the can before use until you can hear the stirring balls rattle and continue shaking vigorously for 2 more minutes. Optimal layer thickness: Spray evenly onto the prepared surface from a distance of 20 - 30 cm using 3 - 4 cross coats or circular movements. Avoid local excesses. For thicker layers, apply another coat after the solvent has evaporated. After spraying, turn the can upside down and spray the valve in this position until only solvent comes out. Drying and curing times as per following technical data.

## OKS 2571 Aluminium Protection, Spray

### Packaging

- 400 ml Spray

### Technical data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
binder				epoxy resin
solvent				solvent mixture
solid lubricants				aluminium powder
solid lubricants				Zinc powder
<b>Application related technical data</b>				
lower operating temperature			°C	-70
optimal layer thickness	DIN EN ISO 2178/2360	DIN 50 982-2	µm	60-80
surface covering		layer thickness 70 µm	m²/can	approx. 1-2
processing temperature			°C	10-35
drying time		20°C	min	5-10
curing time		at 20°C	h	12-24
curing time		at 150°C	min	15
colour				aluminium-coloured
density (at 20°C)	DIN EN ISO 3838		g/cm³	0.67
Cross-cutting test	DIN EN ISO 2409	Grid spacing of 2 mm		GT=0
salt spray test	DIN EN ISO 9227	layer thickness >70 µm air-drying	h	>400
salt spray test	DIN EN ISO 9227	layer thickness >100 µm heat-curing (150°C/15min)	h	>600
<b>Properties and approvals</b>				
UFI				WVRD-409Y-400R-62N0

### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47

82216 Maisach

+49 8142 3051 - 500

info@oks-germany.com

www.oks-germany.com

a brand of  
**FREUDENBERG**

The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark  
**Product restricted to professional users.** Safety data sheet available for download at [www.oks-germany.com](http://www.oks-germany.com)  
Our Customer and Technical service will be pleased to help should you have any further questions.