


## OKS 4240 Special Grease for Ejector Pins

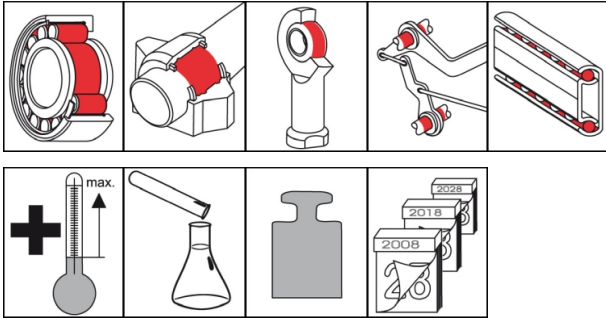

### Description

OKS 4240 is a special grease for the lubrication of ejector pins in the plastics industry.

### Applications

- Lubrication of ejector pins in the plastics industry at high temperatures and slow movements
- Lubrication of rolling and friction bearings at extremely high temperatures and aggressive operating conditions

### Branches

- Rubber and plastic processing
- Paper and packaging industry
- Municipal services
- Shipbuilding and marine technology
- Logistics
- Glass and foundry industry
- Rail vehicle technology
- Plant and machine (tool) engineering
- Iron and steel industry
- Chemical industry

### Application tips

Clean the lubricating points well for optimal effect. Subsequently blow out with dry compressed air. Before greasing for first time, remove anti-corrosion agent. Apply grease evenly to functional surfaces. Fill bearings running slowly completely, fill high-speed bearings (DN value > 100,000) only up to about 2/3 of the free space inside the bearing. The bearing and machine manufacturer's instructions should be observed. Relubrication at temperatures under 200°C not required. Assess the lubrication frequency and quantity on basis of service conditions. Only mix with suitable lubricants.

### Packaging

- 250 g Dispenser
- 1 kg Can

### Advantages and benefits

- Extraordinarily good resistance to vapours occurring during plastic processing
- Good plastic and elastomer compatibility
- Excellent temperature resistance
- Lowest evaporation losses, also at high temperatures ensure long regreasing intervals
- Good media resistance
- Also suitable for fast-running bearings thanks to low share of solid lubricants



**KLÜBER**  
a product brand of LUBRICATION

# OKS 4240

## Special Grease for Ejector Pins

### Technical data

|   | Standard        | Conditions   | Unit               | Value                     |
|---|-----------------|--------------|--------------------|---------------------------|
| <b>Main components</b>                    |                 |              |                    |                           |
| base oil                                  |                 |              |                    | perfluoropolyether (PFPE) |
| thickener                                 |                 |              |                    | inorganic                 |
| solid lubricants                          |                 |              |                    | PTFE                      |
| <b>Application related technical data</b> |                 |              |                    |                           |
| marking                                   | DIN 51 502      | DIN 51 825   |                    | MFFK2U-20                 |
| Viscosity base oil                        | DIN 51 562-1    | at 40°C      | mm <sup>2</sup> /s | 440                       |
| pour point                                | DIN ISO 3016    | 3°C step     | °C                 | -42                       |
| consistency                               | DIN 51 818      | DIN ISO 2137 | NLGI grade         | 2                         |
| worked penetration                        | DIN ISO 2137    | 60DH         | 0.1 mm             | 265-295                   |
| lower operating temperature               |                 |              | °C                 | -20                       |
| upper operating temperature               |                 |              | °C                 | 300                       |
| colour                                    |                 |              |                    | white                     |
| density                                   | DIN EN ISO 3838 | at 20°C      | g/cm <sup>3</sup>  | 1.9                       |
| DN value (dm x n)                         |                 |              | mm/min             | 350,000                   |
| four-ball test rig welding load           | DIN 51 350-4    |              | N                  | 4,800                     |
| <b>Properties and approvals</b>           |                 |              |                    |                           |
| UFI                                       |                 |              |                    | 3HQ8-50KC-Y006-ENUT       |

**Klüber Lubrication München GmbH & Co. KG**  
Geisenhausenerstraße 7 / 81379 München /  
Germany / phone +49 89 7876-0

The data in this document is based on our general experience and knowledge at the time of publication and is intended to give information of possible applications to a reader with technical experience. It constitutes neither an assurance of product properties nor does it release the user from the obligation of performing preliminary field tests with the product selected for a specific application. All data are guide values which depend on the lubricant's composition, the intended use and the application method. The technical values of lubricants change depending on the mechanical, dynamical, chemical and thermal loads, time and pressure. These changes may affect the function of a component. We recommend contacting us to discuss your specific application. If possible we will be pleased to provide a sample for testing on request. Klüber products are continually improved. Therefore, Klüber Lubrication reserves the right to change all the technical data in this document at any time without notice.