


## OKS 601 Multi Oil, Spray

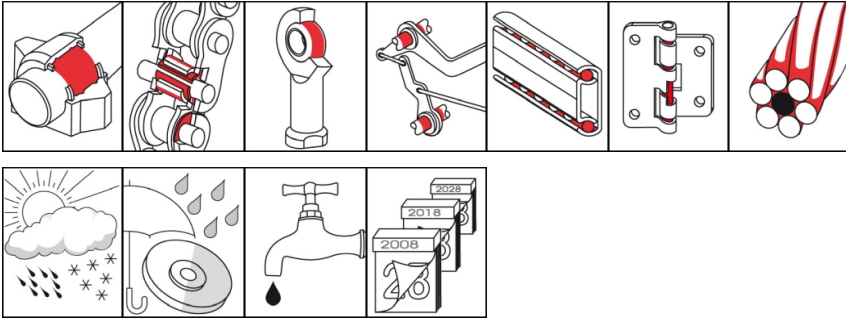

### Description

Low-viscosity light-coloured multipurpose oil for a wide range of applications in industrial maintenance and in the workshop field.

### Applications

- For cleaning and care of metal surfaces
- Dismantling rusted-in parts
- Protects electrical contacts
- Temporary corrosion protection for bare metal surfaces
- Elimination of squeaking noises
- Lubrication of friction points at moving machine parts

### Advantages and benefits

- Broad range of uses (6-fold action)
- Highly effective due to very good creep properties
- Also infiltrates strong oil and greasy soiling
- Good lubricating properties thanks to high oil percentage
- Displaces moisture

### Branches

- Rail vehicle technology
- Chemical industry
- Paper and packaging industry
- Rubber and plastic processing
- Iron and steel industry
- Shipbuilding and marine technology
- Maintenance and servicing
- Municipal services
- Logistics
- Plant and machine (tool) engineering
- Glass and foundry industry

### Application tips

For optimum effectiveness, first clean contamination away from surface mechanically. Spray OKS 601 on. Allow to work in for time corresponding to depth of penetration required. If necessary, repeat the application several times. Apply in sufficient quantities for lubrication. Only mix with suitable lubricants.

### Packaging

- 400 ml Spray

## OKS 601 Multi Oil, Spray

### Technical data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
base oil				mineral oil
<b>Application related technical data</b>				
marking	analogue to DIN 51 502			CL 3
viscosity (at 40°C)	DIN 51 562-1		mm <sup>2</sup> /s	approx. 3
flashing point	DIN EN 22 719		°C	> 64
lower operating temperature			°C	-30
upper operating temperature		with solvent	°C	60
upper operating temperature		after evaporation of the solvent	°C	150
colour				brownish transparent
density (at 20°C)	DIN EN ISO 3838		g/cm <sup>3</sup>	0.74
salt spray test	DIN EN ISO 9227		h	> 50
coefficient of friction SRV (μ)	DIN 51 834-2	ball, disk		0.09
wear SRV	DIN 51 834-2	ball, disk	mm <sup>3</sup>	< 0.003
<b>Properties and approvals</b>				
UFI				J4E1-G0FJ-9006-2F6P

### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47

82216 Maisach

+49 8142 3051 - 500

info@oks-germany.com

www.oks-germany.com

a brand of  
**FREUDENBERG**

The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark

**Product restricted to professional users.** Safety data sheet available for download at [www.oks-germany.com](http://www.oks-germany.com)  
Our Customer and Technical service will be pleased to help should you have any further questions.