


## OKS 641 Maintenance Oil, Spray

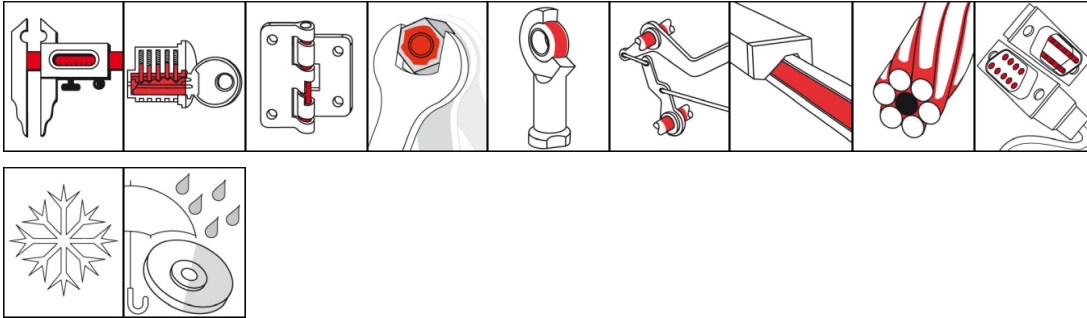

### Description

Maintenance oil for dismantling, lubrication and care of machine elements and metal surfaces.

### Applications

- Dismantling of all seized or sticky components or machine elements, e.g. door locks, hinges, screws, bolts, bushings, cranks, linkages, valves, slide rails, cable pulls, shafts, etc.
- Lubrication of fine-mechanical instruments, measuring instruments, office and computer equipment etc., even at low temperatures

### Branches

- Rubber and plastic processing
- Rail vehicle technology
- Chemical industry
- Iron and steel industry
- Paper and packaging industry
- Maintenance and servicing
- Shipbuilding and marine technology
- Glass and foundry industry
- Plant and machine (tool) engineering
- Municipal services
- Logistics

### Application tips

Apply generously to the points to be lubricated, sticky or rusted points. Let the product air. Allow to work in for time corresponding to the degree of binding and the depth of penetration required. Repeat as necessary. Light blows on the corresponding point makes the loosening process easier. Only mix with suitable lubricants.

### Packaging

- 400 ml Spray

### Advantages and benefits

- Highly effective due to ideal combination of mineral oil and additives with solvent
- Broad range of uses in the complete maintenance sector
- Displaces moisture, protects against corrosion
- Cleans, maintains and lubricates
- Gets under rust

## OKS 641 Maintenance Oil, Spray

### Technical data

|   | Standard                 | Conditions                       | Unit  | Value               |
|---|--------------------------|----------------------------------|-------|---------------------|
| <b>Main components</b>                    |                          |                                  |       |                     |
| base oil                                  |                          |                                  |       | mineral oil         |
| <b>Application related technical data</b> |                          |                                  |       |                     |
| viscosity (at 40°C)                       | DIN 51 562-1             | with solvent                     | mm²/s | 3                   |
| flashing point                            | DIN ISO 2592             |                                  | °C    | > 64                |
| lower operating temperature               |                          |                                  | °C    | -30                 |
| upper operating temperature               |                          | with solvent                     | °C    | 60                  |
| upper operating temperature               |                          | after evaporation of the solvent | °C    | 150                 |
| colour                                    |                          |                                  |       | brown               |
| density (at 20°C)                         | DIN EN ISO 3838          |                                  | g/cm³ | 0.83                |
| salt spray test                           | DIN EN ISO 9227          |                                  | h     | > 100               |
| coefficient of friction SRV (μ)           | analogue to DIN 51 834-2 | ball, disk                       |       | 0.11                |
| wear SRV                                  | analogue to DIN 51 834-2 | ball, disk                       | mm³   | 0.003               |
| <b>Properties and approvals</b>           |                          |                                  |       |                     |
| UFI                                       |                          |                                  |       | 5DH1-Q0PM-X000-6EC4 |

### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47

82216 Maisach

+49 8142 3051 - 500

info@oks-germany.com

www.oks-germany.com

a brand of  
**FREUDENBERG**

The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark  
**Product restricted to professional users.** Safety data sheet available for download at [www.oks-germany.com](http://www.oks-germany.com)  
Our Customer and Technical service will be pleased to help should you have any further questions.