


## OKS 3751

### Adhesive Lubricant with PTFE, Spray

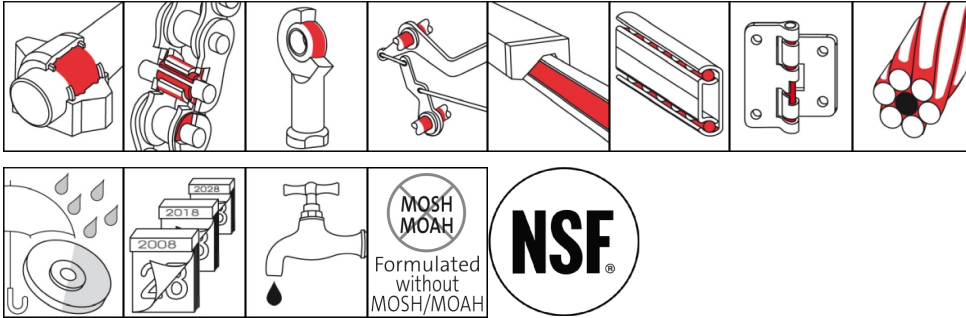

#### Description

Fully synthetic high-performance oil with PTFE and excellent adhesive properties.

#### Applications

- For lubricating machine elements under high loads (also under water influence)
- Lubrication of chains, joints and guides
- Lubrication of rolling and friction bearings
- Lubrication of toothed gearings, fittings, hinges and locks

#### Branches

- Catering equipment and food processing technology
- Paper and packaging industry
- Municipal services
- Glass and foundry industry
- Chemical industry
- Rubber and plastic processing
- Rail vehicle technology
- Logistics
- Plant and machine (tool) engineering
- Shipbuilding and marine technology

#### Advantages and benefits

- NSF H1 registered
- The optimal additives allow good resistance to oxidation and ageing for long operating and durability
- Resistant to cold and hot water, steam and alkaline and acidic disinfectants and cleaning agents
- Duolabel
- Formulated without MOSH/MOAH

#### Application tips

Clean the lubricating point for optimal effect. Spray on evenly OKS 3751 spray. Shake the can before use until the stirring balls can be heard. In as far as available, observe the machine manufacturer's instructions. Assess the lubrication frequency and quantity on the basis of the service conditions. Caution: Only mix with suitable lubricants.

#### Packaging

- 400 ml Spray

# OKS 3751

## Adhesive Lubricant with PTFE, Spray

### Technical data

|                                           | Standard        | Conditions         | Unit               | Value                                   |
|-------------------------------------------|-----------------|--------------------|--------------------|-----------------------------------------|
| <b>Main components</b>                    |                 |                    |                    |                                         |
| base oil                                  |                 |                    |                    | polyalphaolefine                        |
| solid lubricants                          |                 |                    |                    | PTFE                                    |
| <b>Application related technical data</b> |                 |                    |                    |                                         |
| marking                                   | DIN 51 502      | DIN 51 825         |                    | CLPF HC 100                             |
| viscosity                                 | DIN 51 562-1    | at 40°C            | mm <sup>2</sup> /s | 100                                     |
| viscosity                                 | DIN 51 562-1    | at 100°C           | mm <sup>2</sup> /s | 12                                      |
| viscosity class                           | DIN ISO 3448    | DIN 51 562-1, 40°C | ISO VG             | 100                                     |
| pour point                                | DIN ISO 3016    | 3°C step           | °C                 | < -40                                   |
| flashing point                            | DIN ISO 2592    | > 79               | °C                 | > 240                                   |
| lower operating temperature               |                 |                    | °C                 | -35                                     |
| upper operating temperature               |                 |                    | °C                 | 180                                     |
| colour                                    |                 |                    |                    | whitish                                 |
| density                                   | DIN EN ISO 3838 | at 20°C            | g/cm <sup>3</sup>  | 0.68                                    |
| four-ball test rig welding load           | DIN 51 350-2    |                    | N                  | 3,000                                   |
| four-ball test rig wear                   | DIN 51 350-3/B  |                    | mm                 | 0.4                                     |
| <b>Properties and approvals</b>           |                 |                    |                    |                                         |
| UFI                                       |                 |                    |                    | QFE1-H074-H005-QTHX                     |
| approval for food processing technology   |                 |                    |                    | <a href="#">NSF H1, Reg.-Nr. 124801</a> |

**Klüber Lubrication München GmbH & Co. KG**  
 Geisenhausenerstraße 7 / 81379 München /  
 Germany / phone +49 89 7876-0

The data in this document is based on our general experience and knowledge at the time of publication and is intended to give information of possible applications to a reader with technical experience. It constitutes neither an assurance of product properties nor does it release the user from the obligation of performing preliminary field tests with the product selected for a specific application. All data are guide values which depend on the lubricant's composition, the intended use and the application method. The technical values of lubricants change depending on the mechanical, dynamical, chemical and thermal loads, time and pressure. These changes may affect the function of a component. We recommend contacting us to discuss your specific application. If possible we will be pleased to provide a sample for testing on request. Klüber products are continually improved. Therefore, Klüber Lubrication reserves the right to change all the technical data in this document at any time without notice.