
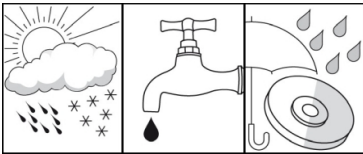


## OKS 2300 Mould Protector



### Description

OKS 2300 generates a temporary corrosion protection film for storage and shipping of machine parts with bare metal surfaces.

### Applications

- Preservation of bare metal surfaces of all kinds, which are stored for longer periods and are subject to effects of weathering
- Protected parts retain their decorative appearance, as no surface discolouration occurs
- Ideal on-call and storage protection for spare parts with possibility of direction installation

### Branches

- Glass and foundry industry
- Chemical industry
- Rail vehicle technology
- Iron and steel industry
- Shipbuilding and marine technology
- Logistics
- Paper and packaging industry
- Plant and machine (tool) engineering
- Rubber and plastic processing
- Municipal services

### Advantages and benefits

- Highly effective due to good film-forming properties
- Outstanding corrosion and oxidation protection
- No degreasing prior to commissioning required, as compatible with all lubricants
- Waterproof and resistant to weathering
- Suitable for all climate zones
- Also available as spray version OKS 2301

### Application tips

For optimum results clean surfaces, first mechanically and then with OKS 2610/OKS 2611 Universal Cleaner. The surfaces must be metallic bright and dry. Stir product thoroughly before use. Apply evenly a thin film to the prepared surfaces, preferably by spraying or dipping, in individual cases also by brush. Avoid local excess. Drying conditions as per the following technical data.

### Packaging

- 5 l Canister
- 25 l Canister
- 200 l Drum

# OKS 2300

## Mould Protector

### Technical data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
solvent				special boiling point gasoline
solid lubricants				synthetic wax
additives				corrosion protection
<b>Application related technical data</b>				
lower operating temperature			°C	-40
upper operating temperature			°C	70
optimal layer thickness	DIN 50 981/50 984	DIN 50 982-2	µm	> 10
surface covering			m²/l	approx. 20
processing temperature			°C	20-25
drying time		20°C	min	6
colour				greenish
density (at 20°C)	DIN EN ISO 3838		g/cm³	0.8
salt spray test	DIN EN ISO 9227	layer thickness 50 µm	h	> 1,000
<b>Properties and approvals</b>				
UFI				NRQ1-50S0-K00M-5PFW

### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47

82216 Maisach

+49 8142 3051 - 500

info@oks-germany.com

www.oks-germany.com

a brand of  
**FREUDENBERG**

The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark  
**Product restricted to professional users.** Safety data sheet available for download at [www.oks-germany.com](http://www.oks-germany.com)  
Our Customer and Technical service will be pleased to help should you have any further questions.