


OKS 30

Mo_x-Active Additive

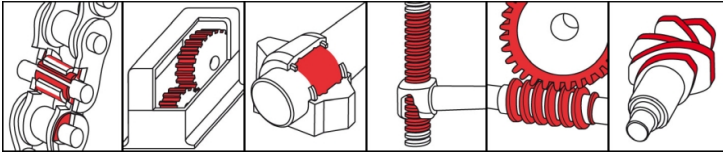

Mo_x - Active

Description

OKS 30 is a modern EP-additive for improving the long-term effectiveness of lubricants.

Applications

- Improves the run-in lubrication of new or overhauled machines and increases the load-carrying capacity
- Improves the lubricating properties of the oil under high loads and at high temperatures
- Reduces operating noises and wear

Branches

- Municipal services
- Plant and machine (tool) engineering
- Shipbuilding and marine technology
- Paper and packaging industry
- Glass and foundry industry
- Chemical industry
- Rail vehicle technology
- Iron and steel industry
- Rubber and plastic processing
- Logistics

Advantages and benefits

- Forms a pressure-resistant layer with high lubricating effectiveness
- Increase in the load-bearing share
- Reduction in the specific surface loading
- Lower thermal loading of the lubricant
- Considerably extended service life

Application tips

Shake or stir well before use. Depending on loading, add 2-3% to engine oils and 3-5% to machine- and gear oils. Instructions of the machine manufacturer have to be observed. Mixing will occur in operation. Mix with appropriate lubricants only. Not suitable with water-based lubricants and polyglycol oils. Especially at older machines and machines normally used with unalloyed oils, the compatibility of OKS 30 with the installed gaskets has to be proved before application.

Packaging

- 1 l Bottle
- 5 l Canister



OKS 30

Mo_x-Active Additive

Technical data

	Standard	Conditions	Unit	Value
Main components				
base oil				ester
additives				Mo _x -Active
Application related technical data				
viscosity (at 40°C)	DIN 51 562-1		mm ² /s	70
viscosity class	DIN ISO 3448	DIN 51 562-1, 40°C	ISO VG	68
pour point	DIN ISO 3016	3°C step	°C	-27
flashing point	DIN ISO 2592	> 79	°C	176
colour				greenish
density (at 20°C)	DIN EN ISO 3838		g/cm ³	1
Properties and approvals				
UFI				

OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47

82216 Maisach

+49 8142 3051 - 500

info@oks-germany.com

www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark
Product restricted to professional users. Safety data sheet available for download at www.oks-germany.com
 Our Customer and Technical service will be pleased to help should you have any further questions.

