


# OKS 1112

## Silicone Grease for Vacuum Valves

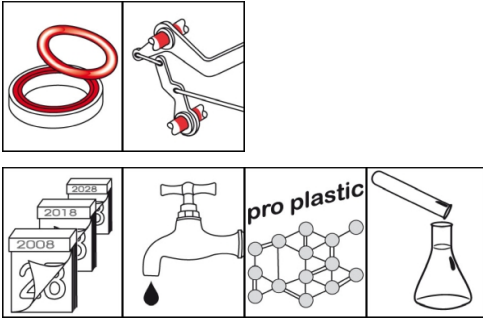

### Description

OKS 1112 is a silicone grease for slide valves and valves.

### Applications

- Lubrication of closing devices and taps, as well as ground joints in industrial vacuum and laboratory equipment, if the consistency of other OKS silicone greases is insufficient

### Branches

- Plant and machine (tool) engineering
- Iron and steel industry
- Municipal services
- Shipbuilding and marine technology
- Glass and foundry industry
- Chemical industry
- Rubber and plastic processing
- Logistics
- Rail vehicle technology
- Paper and packaging industry

### Advantages and benefits

- No carbonization, no melting, steam pressure stays negligible up to +200°C
- Nearly constant consistency between -30 and +200°C
- No corrosive influence on metals and no softening influence on rubber and plastics
- Good resistance against solvents and excellent resistance against numerous chemical agents
- Resistive to cold and hot water, acetone, ethanol, ethylenglycole, glycerine and methanol, most of diluted bases and acids mineral and vegetable oils and numerous organic compounds and almost all usual gases

### Application tips

For best results, clean lubricant points and surfaces carefully, e.g. with OKS 2610 or OKS 2611. Apply grease evenly thin to the function point (e.g. with a brush or spatula etc.). Avoid excess. Observe the instructions of the machine manufacturer. Only mix with appropriate lubricants. Silicone-based plastics, e.g. silicone rubber, can be dissolved by silicone grease. Silicone grease must not be applied to sliding surfaces under influence of pure oxygen.

### Packaging

- 500 g Can
- 5 kg Hobbock

# OKS 1112

## Silicone Grease for Vacuum Valves

### Technical data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
base oil				polydimethylsiloxane
thickener				inorganic
<b>Application related technical data</b>				
marking	DIN 51 502	DIN 51 825		MSI3S-30
viscosity at (25°C)	DIN 51 562-1	base oil	mm <sup>2</sup> /s	100,000
pour point	DIN ISO 3016	3°C step	°C	-40
consistency	DIN 51 818	DIN ISO 2137	NLGI grade	3
worked penetration	DIN ISO 2137	60DH	0.1 mm	220-250
oil separation	DIN 51 817	18h/40°C	percent in weight	0
oil separation	DIN 51 817	168h/40°C	percent in weight	0.14
resistance to oxidation	DIN 51 808	100h/160°C	bar	< 0.7
lower operating temperature			°C	-30
upper operating temperature			°C	200
colour				transparent
density (at 20°C)	DIN EN ISO 3838		g/cm <sup>3</sup>	1
<b>Product specific technical data</b>				
evaporation loss	DIN 58 397-1	24h, 200°C	percent in weight	< 3.0
<b>Properties and approvals</b>				
UFI				

### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47

82216 Maisach

+49 8142 3051 - 500

info@oks-germany.com

www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark  
**Product restricted to professional users.** Safety data sheet available for download at [www.oks-germany.com](http://www.oks-germany.com)  
 Our Customer and Technical service will be pleased to help should you have any further questions.