


# OKS 469

## Plastic and Elastomer Grease

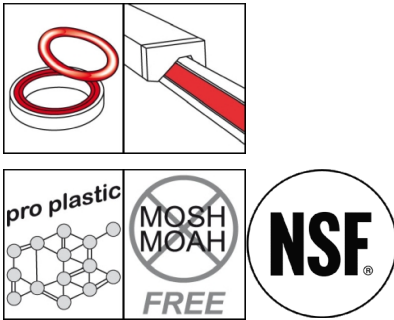

### Description

Silicone-free lubricant and sealing lubricant for plastic/plastic and plastic/metal combinations

### Applications

- For the lubrication of plastic/plastic and plastic/metal combinations, e.g. single-serving taps in the food industry or for beverage can holders in the automotive industry
- Silicone-free alternative for the lubrication of O-rings and sealings during assembly

### Branches

- Rubber and plastic processing
- Paper and packaging industry
- Rail vehicle technology
- Iron and steel industry
- Municipal services
- Logistics
- Glass and foundry industry
- Plant and machine (tool) engineering
- Shipbuilding and marine technology
- Chemical industry

### Advantages and benefits

- Good compatibility to plastics
- Constant properties without drying, hardening or bleeding
- Tested for beer foam compatibility
- NSF H1 registered
- Silicone-free
- MOSH/MOAH-free (as per recipe)

### Application tips

For optimum effect clean thoroughly the lubrication point, e.g. with OKS 2610/2611 Universal Cleaner, where possible. Apply an thin layer of grease with brush, spatula etc. on the functional area. Avoid excess. Instructions of the bearing and machine manufacturer have to be observed. Due to a multitude of used polymers we strongly recommend to make tests in critical applications prior to use. Relubrication intervals and amount to be defined acc. to the service conditions. Mix with appropriate lubricants only.

### Packaging

- 1 kg Can

# OKS 469

## Plastic and Elastomer Grease

### Technical data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
base oil				polyalphaolefine
thickener				inorganic
<b>Application related technical data</b>				
viscosity (at 40°C)	DIN 51 562-1	base oil	mm²/s	400
consistency			NLGI grade	2
unworked penetration	DIN ISO 2137		0.1 mm	265-295
oil separation	DIN 51 817	168h/40°C	percent in weight	1.36
lower operating temperature			°C	-25
upper operating temperature			°C	150
colour				transparent
density (at 20°C)	DIN EN ISO 3838		g/cm³	0.84
<b>Properties and approvals</b>				
UFI				
approval for food processing technology				<a href="#">NSF H1, Reg.-Nr. 131380</a>
Tested for beer foam compatibility				approval of the BPV Weihenstephan

### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47

82216 Maisach

+49 8142 3051 - 500

info@oks-germany.com

www.oks-germany.com

a brand of  
**FREUDENBERG**

The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark  
**Product restricted to professional users.** Safety data sheet available for download at [www.oks-germany.com](#)  
Our Customer and Technical service will be pleased to help should you have any further questions.