


# OKS 1149

## Silicone Grease, with PTFE

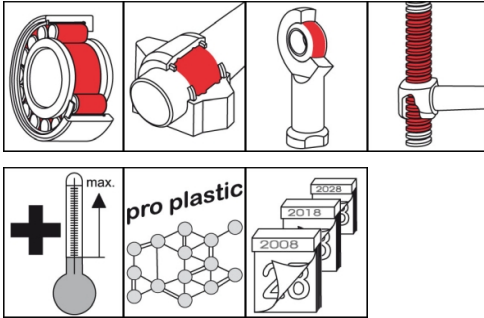

### Description

OKS 1149 is a silicone grease with PTFE for the long-term lubrication of plastic/plastic, plastic/metal, and elastomer/metal pairs under low to medium bearing loads and speeds.

### Applications

- Lubrication of rolling bearings at operating temperatures of -50°C to +180°C
- For long-term lubrication of temperature-stressed electric motor bearings, e.g. in household appliances or of bearings which are to start up easily at low temperatures
- Initial lubrication of roller bearings, such as ball bearings that are open, closed on one side, or sealed off on both sides

### Branches

- Rubber and plastic processing
- Shipbuilding and marine technology
- Plant and machine (tool) engineering
- Municipal services
- Iron and steel industry
- Paper and packaging industry
- Logistics
- Rail vehicle technology
- Chemical industry
- Glass and foundry industry

### Advantages and benefits

- Broad range of uses outside normal grease performance areas
- Reduces wear and friction
- High resistance to oxidation
- Wide operating temperature range and good low-temperature properties
- Very good corrosion protection
- Very good compatibility with most plastics and elastomers

# OKS 1149

## Silicone Grease, with PTFE

### Application tips

For highest effectiveness, carefully clean the lubrication point, for example with OKS 2610/OKS 2611 universal cleaner. Before filling for first time, remove anti-corrosion agent. Fill the bearing such that all functional surfaces are certain of being greased. Fill normal bearings only up to about 1/3 of the free space inside the bearing. Low-speed bearings (DN value < 50,000) and their housings should be filled completely. The bearing and machine manufacturer's instructions should be observed. Subsequent lubrication at the lubrication nipples by grease gun or by automatic lubrication system. Determine the lubrication frequency and quantity on basis of service conditions. If old grease cannot be removed, restrict the quantity of grease so as to avoid overlubricating the bearing. If lubrication frequencies tend to be low, you should aim for a full grease change. Only mix with suitable lubricants. Bearings lubricated with silicone grease may only be stressed to about 1/3 of the permissible bearing load. Plastic based on silicone, such as silicone rubber can be attacked by silicone grease. Silicone grease may not be used at sliding points under pure oxygen influence. The product belongs in the category of silicone-oil greases with PTFE. Explosive decomposition reactions can occur at these products in conveyor systems having a high pressure build-up and small wire cross-sections. Avoid the intake of air, small wire cross-sections, high pressures and rapid pressure increases. Ventilate the plant well before commissioning it.

### Packaging

- 400 ml Cartridge
- 500 g Can
- 5 kg Hobbock
- 25 kg Hobbock

### Technical data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
base oil				silicone oil
thickener				lithium-complex soap
solid lubricants				PTFE
additives				EP additives
<b>Application related technical data</b>				
marking	analogue to DIN 51 502			KFSI2-3R-50
viscosity at (25°C)	DIN 51 562-1	base oil	mm <sup>2</sup> /s	200
drop point	DIN ISO 2176		°C	> 250
consistency	DIN 51 818	DIN ISO 2137	NLGI grade	2-3
worked penetration	DIN ISO 2137	60DH	0.1 mm	245-275
oil separation	DIN 51 817	18h/40°C	percent in weight	< 1.5
lower operating temperature	DIN 51 805	≤ 1,400 hPa	°C	-50
upper operating temperature			°C	180
colour				white
density (at 20°C)	DIN 51 757		g/cm <sup>3</sup>	1.02
SKF-EMCOR	DIN 51 802	7 days, distilled water	corr. degree	0-1
<b>Properties and approvals</b>				
UFI				



# OKS 1149

## Silicone Grease, with PTFE

### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47

82216 Maisach

☎ +49 8142 3051 - 500

✉ [info@oks-germany.com](mailto:info@oks-germany.com)

🏠 [www.oks-germany.com](http://www.oks-germany.com)

a brand of  
 **FREUDENBERG**

The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark

**Product restricted to professional users.** Safety data sheet available for download at [www.oks-germany.com](http://www.oks-germany.com)  
Our Customer and Technical service will be pleased to help should you have any further questions.