


## OKS 1110

### Multi-Silicone Grease

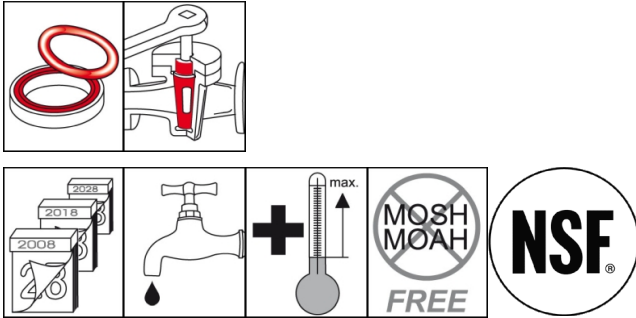

#### Description

Highly adhesive transparent silicone grease for fittings, seals and plastic parts.

#### Applications

- Sealant and lubricant for cold and hot-water valves in vehicle heating systems or cooling circuits and for ground seals on glass taps and desiccators
- Lubrication of O-rings and rubber seals for assembly and during operation
- Lubrication of plastic parts

#### Branches

- Catering equipment and food processing technology
- Shipbuilding and marine technology
- Logistics
- Chemical industry
- Paper and packaging industry
- Iron and steel industry
- Rail vehicle technology
- Glass and foundry industry
- Municipal services
- Plant and machine (tool) engineering
- Rubber and plastic processing

#### Advantages and benefits

- NSF H1 registered
- Tasteless and odourless
- Highly effective due to excellent adhesion on all materials
- Neutral behaviour with regard to plastics and elastomers
- Completely EPDM-compatible
- High long-term stability without drying out, hardening or bleeding
- Resistant to cold and hot water, as well as acetone, ethanol, ethylene glycol, glycerine and methanol
- MOSH/MOAH-free (as per recipe)

#### Application tips

Clean the lubricating points well for optimal effect. Apply the grease evenly and thinly to the functional surfaces with a brush, spatula, etc. Avoid excesses. In as far as available, observe the machine manufacturer's instructions. Assess the lubrication frequency and quantity on basis of service conditions. Only mix with suitable lubricants. Caution: Plastic based on silicone, such as silicone rubber can be attacked by silicone grease. Silicone grease may not be used at sliding points under pure oxygen influence.

# OKS 1110

## Multi-Silicone Grease

### Packaging

- 10 ml Tube
- 80 ml Tube
- 400 ml Cartridge
- 4 g Tube
- 500 g Can
- 1 kg Can
- 5 kg Hobbock
- 25 kg Hobbock
- 180 kg Drum

### Technical data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
base oil				polydimethylsiloxane
thickener				inorganic
<b>Application related technical data</b>				
marking	DIN 51 502	DIN 51 825		MSI3S-40
viscosity (at 40°C)	DIN 51 562-1	base oil	mm²/s	9,500
viscosity at (100°C)	DIN 51 562-1	base oil	mm²/s	3,800
drop point	DIN ISO 2176		°C	without
consistency	DIN 51 818	DIN ISO 2137	NLGI grade	3
unworked penetration	DIN ISO 2137		0.1 mm	180-210
flow pressure	DIN 51 805	-40°C	mbar	< 100
flow pressure	DIN 51 805	20°C	mbar	50
oil separation	DIN 51 817	18h/40°C	percent in weight	<0.01
oil separation	DIN 51 817	168h/40°C	percent in weight	<0.05
resistance to oxidation	DIN 51 808	100h/99°C	bar	< 0.3
lower operating temperature			°C	-40
upper operating temperature			°C	200
colour				transparent
density (at 20°C)	DIN EN ISO 3838		g/cm³	0.96
water resistance	DIN 51 807-1	90°C	Degree	0-90
SKF-EMCOR	DIN 51 802		corr. degree	3-4
<b>Product specific technical data</b>				
evaporation loss	DIN 58 397-1	30h, 200°C	percent in weight	< 2.5
<b>Properties and approvals</b>				
UFI				3DQ2-V05Q-X009-9JGX
approval for food processing technology				<a href="#">NSF H1, Reg.-Nr. 124381</a>
drinking water approval	UBA guideline (D)			test certificate OFI-1085-753
drinking water approval	ACS-conformity to positive lists (F)			test certificate 22 CLP LY 24
Tested for beer foam compatibility				approval of the BPV Weihenstephan



# OKS 1110

## Multi-Silicone Grease

### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47

82216 Maisach

☎ +49 8142 3051 - 500

✉ [info@oks-germany.com](mailto:info@oks-germany.com)

🏠 [www.oks-germany.com](http://www.oks-germany.com)

a brand of  
 **FREUDENBERG**

The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark

**Product restricted to professional users.** Safety data sheet available for download at [www.oks-germany.com](http://www.oks-germany.com)  
Our Customer and Technical service will be pleased to help should you have any further questions.