


## OKS 371

### Multipurpose Oil, for Food Processing Technology, Spray

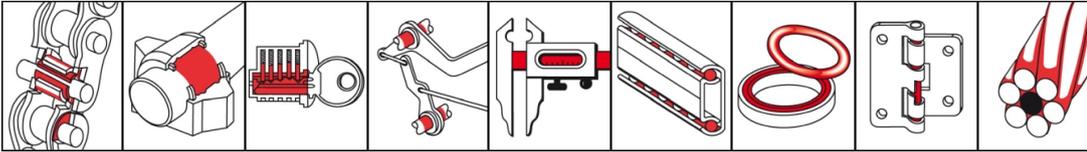

#### Description

Colourless universal oil for food processing technology.

#### Applications

- Lubrication of valve seals, collars, O-rings, drives, piston rods and guides
- Lubrication of slides, slat-band and roller chains
- Lubrication of cutting knives as well as of needles and lifters of knitting machines
- Dismantling of rusted-in parts and removal of oil and greasy soiling

#### Advantages and benefits

- NSF H1, 3H registered
- Highly effective due to good creep properties
- Broad range of uses
- Displaces water

#### Branches

- Catering equipment and food processing technology
- Paper and packaging industry
- Municipal services
- Glass and foundry industry
- Plant and machine (tool) engineering
- Iron and steel industry
- Rail vehicle technology
- Rubber and plastic processing
- Shipbuilding and marine technology
- Logistics
- Chemical industry

#### Application tips

Clean the surfaces for optimal effect. Spray on evenly OKS 371 spray. Avoid excesses. Observe the machine manufacturer's instructions. Assess the lubrication frequency and quantity on the basis of the service conditions. Only mix with suitable lubricants.

#### Packaging

- 400 ml Spray



**OKS 371**

**Multipurpose Oil, for Food Processing Technology, Spray**

Technical data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
base oil				white oil
<b>Application related technical data</b>				
marking				CL 15
viscosity	DIN 51 562-1	at 40°C	mm <sup>2</sup> /s	14
viscosity	DIN 51 562-1	at 100°C	mm <sup>2</sup> /s	3.7
viscosity class	DIN ISO 3448	DIN 51 562-1, 40°C	ISO VG	15
pour point	DIN ISO 3016	3°C step	°C	-18
flashing point	DIN ISO 2592	> 79	°C	195
lower operating temperature			°C	-10
upper operating temperature			°C	180
colour				colourless
density	DIN EN ISO 3838	at 20°C	g/cm <sup>3</sup>	0.7
<b>Properties and approvals</b>				
UFI				NVD1-Y0DC-C00Q-2EFG
approval for food processing technology				<a href="#">NSF H1, 3H, Reg.-Nr. 124384</a>

**Klüber Lubrication München GmbH & Co. KG**  
Geisenhausenerstraße 7 / 81379 München /  
Germany / phone +49 89 7876-0

The data in this document is based on our general experience and knowledge at the time of publication and is intended to give information of possible applications to a reader with technical experience. It constitutes neither an assurance of product properties nor does it release the user from the obligation of performing preliminary field tests with the product selected for a specific application. All data are guide values which depend on the lubricant's composition, the intended use and the application method. The technical values of lubricants change depending on the mechanical, dynamical, chemical and thermal loads, time and pressure. These changes may affect the function of a component. We recommend contacting us to discuss your specific application. If possible we will be pleased to provide a sample for testing on request. Klüber products are continually improved. Therefore, Klüber Lubrication reserves the right to change all the technical data in this document at any time without notice.