



OKS 8600

BIologic Multi Oil

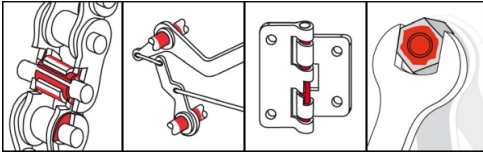

Description

OKS 8600 is a biodegradable multi-oil with highly environmentally friendly ingredients.

Applications

- Lubrication of chains and machine elements operated outdoors
- Multi Oil also at higher temperatures

Branches

- Paper and packaging industry
- Glass and foundry industry
- Rail vehicle technology
- Logistics
- Rubber and plastic processing
- Iron and steel industry
- Chemical industry
- Plant and machine (tool) engineering
- Municipal services
- Shipbuilding and marine technology

Advantages and benefits

- Good lubricating properties
- Good creep capacity
- Biodegradable
- VOC-free
- Can be used up to 160°C
- Silicone-free
- Percentage of renewable raw materials > 90%
- Spray version OKS 8601

Application tips

Clean the surfaces for optimal effect. Apply OKS 8600 with a brush, drip oiler or by immersion or using a suitable automatic lubrication system locations to be lubricated. Avoid excesses. When using on plastics and sensitive surfaces check compatibility beforehand. In as far as available, observe the machine manufacturer's instructions. Assess the lubrication frequency and quantity on the basis of the service conditions. Caution: Only mix with suitable lubricants.

Packaging

- 5 l Canister
- 25 l Canister
- 200 l Drum

OKS 8600

BIologic Multi Oil

Technical data

| | Standard | Conditions | Unit | Value |
|-------------------------------------------|------------------------|--------------------|--------------------|-----------------------|
| Main components | | | | |
| base oil | | | | ester |
| Application related technical data | | | | |
| marking | analogue to DIN 51 502 | | | CLX 32 |
| viscosity (at 40°C) | DIN 51 562-1 | | mm ² /s | 35-40 |
| viscosity class | DIN ISO 3448 | DIN 51 562-1, 40°C | ISO VG | 32 |
| flashing point | DIN ISO 2592 | > 79 | °C | 270 |
| lower operating temperature | | | °C | -5 |
| upper operating temperature | | | °C | 160 |
| colour | | | | yellowish-light brown |
| density (at 20°C) | DIN EN ISO 3838 | | g/cm ³ | 0.92 |
| Product specific technical data | | | | |
| biodegradability | CEC-L-33-T-82 | 21 days | % | > 90 |
| Properties and approvals | | | | |
| UFI | | | | |

OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47

82216 Maisach

+49 8142 3051 - 500

info@oks-germany.com

www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark
Product restricted to professional users. Safety data sheet available for download at www.oks-germany.com
 Our Customer and Technical service will be pleased to help should you have any further questions.