


## OKS 260

### White Assembly Paste

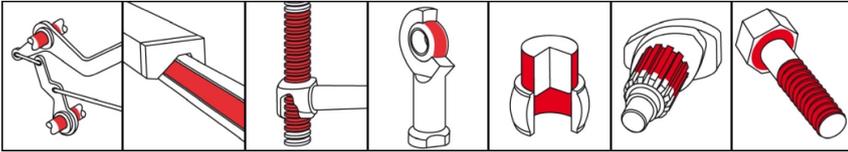

#### Description

Mounting paste for lubricating sliding points at which dark lubricants are not desired and where frictional corrosion is to be avoided.

#### Applications

- Assembly lubrication of sliding points
- Screw lubrication at normal temperatures and low speeds
- Lubrication when joining parts

#### Branches

- Plant and machine (tool) engineering
- Paper and packaging industry
- Glass and foundry industry
- Iron and steel industry
- Shipbuilding and marine technology
- Municipal services
- Logistics
- Rubber and plastic processing
- Rail vehicle technology
- Chemical industry

#### Advantages and benefits

- Prevents frictional corrosion on joint connections of steel parts of all kinds subject to vibration loading under damp-room and aggressive operating conditions
- Low consumption thanks to thin-film lubrication
- Excellent water resistance
- Excellent lubricating and separating effect
- Good corrosion protection behaviour
- Metal-free

#### Application tips

For optimum adhesion, clean contamination and other lubricants from sliding surfaces. Best way is to clean mechanically first (for example, with a wire brush) and then with OXS 2610/OXS 2611 universal cleaner. Apply the paste evenly and thinly with a brush, spatula, etc. Remove excesses. Do not use paste instead of grease and mix only with suitable lubricants.

#### Packaging

- 250 g Can
- 1 kg Can
- 5 kg Hobbock
- 25 kg Hobbock



**OKS 260**  
**White Assembly Paste**

Technical data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
base oil				white oil
thickener				lithium soap
solid lubricants				white solid lubricants
<b>Application related technical data</b>				
viscosity (base oil)	DIN 51 562-1	at 40°C	mm <sup>2</sup> /s	22
flashing point	DIN ISO 2592		°C	195
unworked penetration	DIN ISO 2137	no shear stress	0.1 mm	250-280
lower operating temperature			°C	-25
upper operating temperature			°C	150
colour				light-coloured
density	DIN EN ISO 3838	at 20°C	g/cm <sup>3</sup>	1.25
water resistance	DIN 51 807-1	3h/90°C	Degree	0-90
four-ball test rig welding load	DIN 51 350-4		N	2,600
Total friction coefficient (μ)	DIN EN ISO 16 047	screw ISO 4017 M10x55-8.8 black-oxide, nut ISO 4032 M10-10 black-oxide		0.08
press-fit test (μ)	draft DIN 51 833			0,09, no chatter
<b>Properties and approvals</b>				
UFI				7NMC-M0A6-J00U-Y3QJ

**Klüber Lubrication München GmbH & Co. KG**  
Geisenhausenerstraße 7 / 81379 München /  
Germany / phone +49 89 7876-0

The data in this document is based on our general experience and knowledge at the time of publication and is intended to give information of possible applications to a reader with technical experience. It constitutes neither an assurance of product properties nor does it release the user from the obligation of performing preliminary field tests with the product selected for a specific application. All data are guide values which depend on the lubricant's composition, the intended use and the application method. The technical values of lubricants change depending on the mechanical, dynamical, chemical and thermal loads, time and pressure. These changes may affect the function of a component. We recommend contacting us to discuss your specific application. If possible we will be pleased to provide a sample for testing on request. Klüber products are continually improved. Therefore, Klüber Lubrication reserves the right to change all the technical data in this document at any time without notice.