


OKS 481

High-Pressure Grease, water-resistant, for Food Processing Technology, Spray

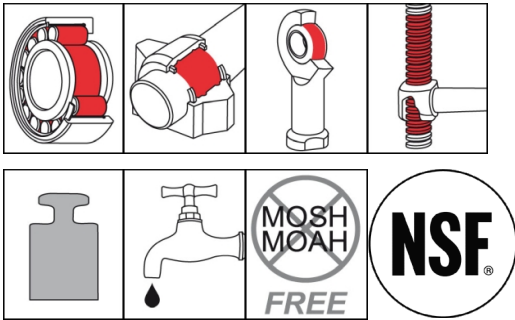

Description

Fully synthetic calcium sulphonate complex grease for high loads and pressures at applications in the complete food processing technology.

Applications

- Rolling and friction bearing lubrication, even at high temperatures
- Lubrication for bearings with contact to cleaning agents or disinfectants
- For mechanical units such as levers, joints and hinges, also under strong water effect

Branches

- Catering equipment and food processing technology
- Rubber and plastic processing
- Chemical industry
- Shipbuilding and marine technology
- Plant and machine (tool) engineering
- Municipal services
- Paper and packaging industry
- Logistics
- Iron and steel industry
- Glass and foundry industry
- Rail vehicle technology

Advantages and benefits

- NSF H1 registered (OKS 480 & OKS 481)
- High shear stability prevents thinning out of the grease under extreme mechanical loads such as during vibrations
- Excellent wear protection and very good high-pressure properties
- The calcium sulphonate complex soap ensures excellent water resistance and very good corrosion protection
- Broad temperature application range (-30°C to +160°C)
- High temperature and oxidation stability through fully synthetic base oil
- Very high resistance to water-alkaline or acidic disinfectants and cleaning agents
- MOSH/MOAH-free (as per recipe)

Application tips

Clean the surfaces for optimal effect. Before filling for first time, remove anti-corrosion agent. Fill the bearing such that all functional surfaces are certain of being greased. Fill normal bearings up to about 1/3 of the free space inside the bearing. Low-speed bearings (DN value below 50,000) and their housings should be filled completely. The bearing and machine manufacturer's instructions should be observed. Subsequent lubrication at the lubrication nipples by grease gun or by automatic lubrication systems. Assess the lubrication frequency and quantity on basis of service conditions. If old grease cannot be removed, restrict the quantity of grease so as to avoid over-lubricating the bearing. If lubrication frequencies tend to be low, you should aim for a full grease change. Only mix with suitable lubricants.

OKS 481

High-Pressure Grease, water-resistant, for Food Processing Technology, Spray

Packaging

- 400 ml Spray

Technical data

| | Standard | Conditions | Unit | Value |
|---|------------------------|--------------|------------|---|
| Main components | | | | |
| base oil | | | | polyalphaolefine |
| thickener | | | | calcium sulphonate complex soap |
| Application related technical data | | | | |
| marking | analogue to DIN 51 502 | | | KPHC2P-30 |
| viscosity (at 40°C) | DIN 51 562-1 | base oil | mm²/s | 100 |
| viscosity at (100°C) | DIN 51 562-1 | base oil | mm²/s | 14.7 |
| drop point | ASTM D2265 | | °C | > 300 |
| consistency | DIN 51 818 | DIN ISO 2137 | NLGI grade | 2 |
| worked penetration | DIN ISO 2137 | 60DH | 0.1 mm | 265-295 |
| lower operating temperature | | | °C | -30 |
| upper operating temperature | | | °C | 160 |
| colour | | | | beige |
| density (at 20°C) | DIN EN ISO 3838 | | g/cm³ | 0.65 |
| DN value (dm x n) | | | mm/min | 400,000 |
| four-ball test rig welding load | DIN 51 350-4 | | N | 4,000 |
| Properties and approvals | | | | |
| UFI | | | | WEX1-NOKY-G007-R9WX |
| approval for food processing technology | | | | NSF H1, Reg.-Nr. 153878 |

OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47

82216 Maisach

+49 8142 3051 - 500

info@oks-germany.com

www.oks-germany.com

a brand of
FREUDENBERG

The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark
Product restricted to professional users. Safety data sheet available for download at www.oks-germany.com
Our Customer and Technical service will be pleased to help should you have any further questions.