



## OKS 240 Copper Paste

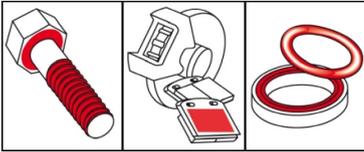

### Description

High-temperature screw paste on copper basis for preventing corrosion, seizing and binding.

### Applications

- Assembling screw threaded connections subjected to high temperatures and corrosive influences
- Screwed connections at pipe fittings, flange joints and fittings in superheated steam lines
- Combustion chamber screwed connections and mounting bolts of gas and oil burners
- Screwed connections at combustion engines, exhaust systems, silencers and exhaust gas pipe connections

### Advantages and benefits

- Allows reliable non-destructive dismantling even after longer operating period under high operating and ambient temperatures
- Provides an optimal ratio of screw pretension and tightening torque
- Electrically conductive
- Also available as spray version OKS 241

### Branches

- Plant and machine (tool) engineering
- Paper and packaging industry
- Municipal services
- Rubber and plastic processing
- Iron and steel industry
- Glass and foundry industry
- Shipbuilding and marine technology
- Logistics
- Rail vehicle technology
- Chemical industry

### Application tips

For best adhesion, clean contamination and other lubricants from thread and slide surfaces. Best way is to clean mechanically first (for example, with a wire brush) and then with OKS 2610/OKS 2611 universal cleaning agent. Apply sufficient OKS 240 evenly to the head or nut contact surface and to the thread by using a brush, spatula, etc. Do not use paste instead of grease and mix only with suitable lubricants.

### Packaging

- 8 ml Tube
- 75 ml Tube
- 250 g Brush tin
- 1 kg Can
- 5 kg Hobbock
- 25 kg Hobbock



**OKS 240**  
**Copper Paste**

Technical data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
base oil				synthetic oil
thickener				inorganic
solid lubricants				copper
solid lubricants				other solid lubricants
solid lubricants				MoS <sub>2</sub>
<b>Application related technical data</b>				
flashing point	DIN ISO 2592	> 79	°C	> 180
drop point	DIN ISO 2176		°C	without
unworked penetration	DIN ISO 2137	no shear stress	0.1 mm	295-340
lower operating temperature			°C	-30
upper operating temperature		separation	°C	1100
colour				copper-brown
density	DIN EN ISO 3838	at 20°C	g/cm <sup>3</sup>	1.3
four-ball test rig welding load	DIN 51 350-4		N	3,000
Total friction coefficient (μ)	DIN EN ISO 16 047	screw ISO 4017 M10x55-8.8 black-oxide, nut ISO 4032 M10-10 black-oxide		0.13
Total friction coefficient (μ)	DIN EN ISO 16 047	Screw ISO 4017 A2 M10x55-70, Nut ISO 4032 A2 M10-70		0.14
breakaway torque	DIN 267-27	M10 A2, 40 Nm, 400 °C, 100 h	Nm	< 2,5 x tightening torque
<b>Properties and approvals</b>				
UFI				E9H1-7007-M00H-J2S2

**Klüber Lubrication München GmbH & Co. KG**  
Geisenhausenerstraße 7 / 81379 München /  
Germany / phone +49 89 7876-0

The data in this document is based on our general experience and knowledge at the time of publication and is intended to give information of possible applications to a reader with technical experience. It constitutes neither an assurance of product properties nor does it release the user from the obligation of performing preliminary field tests with the product selected for a specific application. All data are guide values which depend on the lubricant's composition, the intended use and the application method. The technical values of lubricants change depending on the mechanical, dynamical, chemical and thermal loads, time and pressure. These changes may affect the function of a component. We recommend contacting us to discuss your specific application. If possible we will be pleased to provide a sample for testing on request. Klüber products are continually improved. Therefore, Klüber Lubrication reserves the right to change all the technical data in this document at any time without notice.