
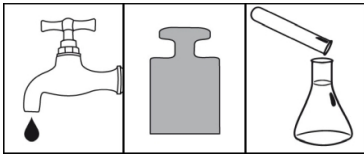


OKS 265

Chuck Jaw Paste

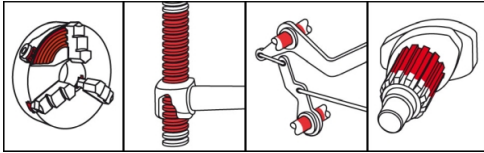

Description

Fully-synthetic chuck jaw paste for lubricating friction and sliding points under high and impact-loaded loads.

Applications

- Long-term lubrication of dirt-sensitive sliding points under vibration stresses
- Particularly suitable for lubricating chucks on tool machines
- Broad range of uses at stress-loaded parts, also at contact with cooling lubricants
- Lubrication of control and drive mechanisms
- Can be used at filling, labelling and packaging machines

Advantages and benefits

- Resistant to water, steam and aqueous cooling lubricants
- Prevents frictional corrosion reliably
- Highly effective due to optimum solid lubricant combination
- Minimal consumption due to formation of highly effective lubricating films

Branches

- Maintenance and servicing
- Glass and foundry industry
- Plant and machine (tool) engineering
- Logistics
- Chemical industry
- Rubber and plastic processing
- Municipal services
- Paper and packaging industry
- Shipbuilding and marine technology
- Iron and steel industry
- Rail vehicle technology

Application tips

For optimum adhesion, clean contamination and other lubricants from thread and slide surfaces. Best way is to clean mechanically first and then with OKS 2610/OKS 2611 universal cleaner. Apply sufficient paste evenly to the functional surfaces with a brush, spatula, etc. The paste will also act as a sealant. Do not use paste instead of grease and mix only with suitable lubricants.

Packaging

- 400 ml Cartridge
- 1 kg Can
- 5 kg Hobbock
- 25 kg Hobbock

OKS 265

Chuck Jaw Paste

Technical data

| | Standard | Conditions | Unit | Value |
|---|-------------------|---|--------------------|------------------------|
| Main components | | | | |
| base oil | | | | polyalphaolefine |
| thickener | | | | lithium soap |
| solid lubricants | | | | white solid lubricants |
| Application related technical data | | | | |
| viscosity (at 40°C) | | | mm ² /s | 31 |
| drop point | DIN ISO 2176 | | °C | approx. 160 |
| unworked penetration | DIN ISO 2137 | no shear stress | 0.1 mm | 250-280 |
| lower operating temperature | | | °C | -45 |
| upper operating temperature | | | °C | 110 |
| colour | | | | light-coloured |
| density (at 20°C) | DIN EN ISO 3838 | | g/cm ³ | 0.95 |
| four-ball test rig welding load | DIN 51 350-4 | | N | 4,200 |
| Total friction coefficient (μ) | DIN EN ISO 16 047 | screw ISO 4017 M10x55-8.8 black-oxide, nut ISO 4032 M10-10 black-oxide | | 0.1 |
| Properties and approvals | | | | |
| UFI | | | | 7YKC-J0T1-300V-PD21 |

OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47

82216 Maisach

+49 8142 3051 - 500

info@oks-germany.com

www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark
Product restricted to professional users. Safety data sheet available for download at www.oks-germany.com
 Our Customer and Technical service will be pleased to help should you have any further questions.