


## OKS 110

### MoS<sub>2</sub> Powder, microsize

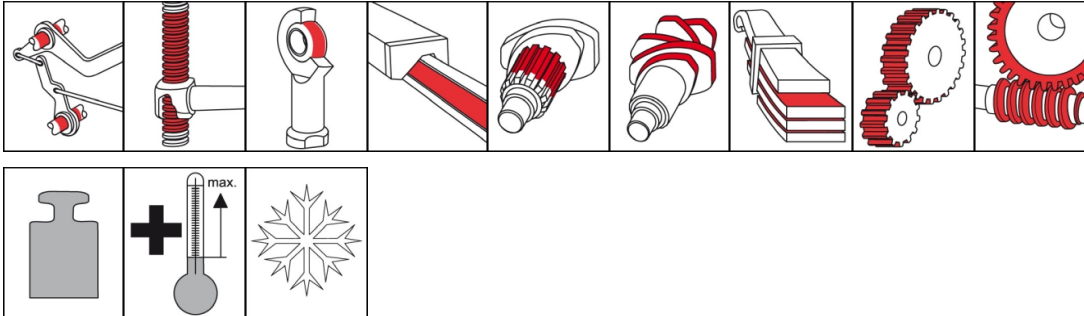

#### Description

OKS 110 is a MoS<sub>2</sub>-powder to improve the sliding properties of machine elements.

#### Applications

- For sliding properties improvement of machine parts, apparatuses and precision machinery, especially for microfinished surfaces
- For incorporation in plastics, sealings, packages, sintered metals and improvement of sliding properties
- For long-term or possibly lifetime-lubrication

#### Branches

- Logistics
- Paper and packaging industry
- Municipal services
- Rail vehicle technology
- Plant and machine (tool) engineering
- Iron and steel industry
- Rubber and plastic processing
- Glass and foundry industry
- Shipbuilding and marine technology
- Chemical industry

#### Advantages and benefits

- Reduces friction and wear in a wide temperature range
- High effectiveness due to high affinity of MoS<sub>2</sub> to metals
- Low friction at highest load capacities
- Low consumption based on forming of extreme thin sliding films
- Not electrically conducting and not magnetic
- Chemically stable except against halogenated gases, concentrated sulphuric- and nitric acid

#### Application tips

For best adhesion, clean sliding surfaces. Best way is to clean mechanically first and then with OKS 2610 or OKS 2611 universal cleaner. Apply on small parts in series production by tumbling, under addition of small amounts powder and tumbling parts, until a complete MoS<sub>2</sub> film is formed. Brush the powder onto bigger surfaces. Addition of approx. 2-3% for self-lubricating material before forming.

#### Packaging

- 1 kg Can
- 5 kg Hobbock
- 25 kg Hobbock

## OKS 110

### MoS<sub>2</sub> Powder, microsize

#### Technical data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
solid lubricants				MoS <sub>2</sub>
degree of purity		MoS <sub>2</sub> -content	percent in weight	> 98.5
<b>Application related technical data</b>				
lower operating temperature			°C	-185
maximal operating temperature		in normal atmosphere	°C	450
maximal operating temperature		in vacuum	°C	1,100
maximal operating temperature		in inert gas	°C	1,300
colour				grey-black
density (at 20°C)			g/cm <sup>3</sup>	4.8
<b>Product specific technical data</b>				
particle size	ISO 13320-1	d 50	µm	2.5-5
particle size		max. d 99	µm	max. 15

#### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47

82216 Maisach

+49 8142 3051 - 500

info@oks-germany.com

www.oks-germany.com

a brand of  
**FREUDENBERG**

The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark  
**Product restricted to professional users.** Safety data sheet available for download at [www.oks-germany.com](http://www.oks-germany.com)  
Our Customer and Technical service will be pleased to help should you have any further questions.