


OKS 371

Multipurpose Oil, for Food Processing Technology, Spray

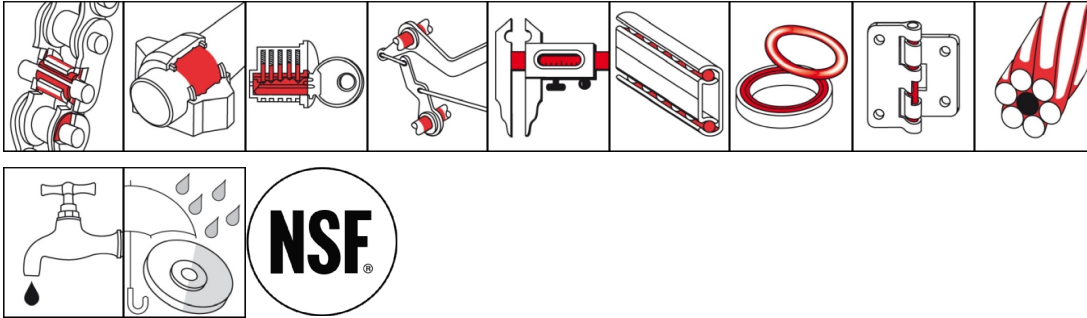

Description

Colourless universal oil for food processing technology.

Applications

- Lubrication of valve seals, collars, O-rings, drives, piston rods and guides
- Lubrication of slides, slat-band and roller chains
- Lubrication of cutting knives as well as of needles and lifters of knitting machines
- Dismantling of rusted-in parts and removal of oil and greasy soiling

Advantages and benefits

- NSF H1, 3H registered
- Highly effective due to good creep properties
- Broad range of uses
- Displaces water

Branches

- Catering equipment and food processing technology
- Paper and packaging industry
- Municipal services
- Glass and foundry industry
- Plant and machine (tool) engineering
- Iron and steel industry
- Rail vehicle technology
- Rubber and plastic processing
- Shipbuilding and marine technology
- Logistics
- Chemical industry

Application tips

Clean the surfaces for optimal effect. Spray on evenly OKS 371 spray. Avoid excesses. Observe the machine manufacturer's instructions. Assess the lubrication frequency and quantity on the basis of the service conditions. Only mix with suitable lubricants.

Packaging

- 400 ml Spray

OKS 371

Multipurpose Oil, for Food Processing Technology, Spray

Technical data

| | Standard | Conditions | Unit | Value |
|---|-----------------|--------------------|--------|---|
| Main components | | | | |
| base oil | | | | white oil |
| Application related technical data | | | | |
| marking | | | | CL 15 |
| viscosity (at 40°C) | DIN 51 562-1 | | mm²/s | 14 |
| viscosity at (100°C) | DIN 51 562-1 | | mm²/s | 3.7 |
| viscosity class | DIN ISO 3448 | DIN 51 562-1, 40°C | ISO VG | 15 |
| pour point | DIN ISO 3016 | 3°C step | °C | -18 |
| flashing point | DIN ISO 2592 | > 79 | °C | 195 |
| lower operating temperature | | | °C | -10 |
| upper operating temperature | | | °C | 180 |
| colour | | | | colourless |
| density (at 20°C) | DIN EN ISO 3838 | | g/cm³ | 0.7 |
| Properties and approvals | | | | |
| UFI | | | | NVD1-Y0DC-C00Q-2EFG |
| approval for food processing technology | | | | NSF H1, 3H, Reg.-Nr. 124384 |

OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47

82216 Maisach

+49 8142 3051 - 500

info@oks-germany.com

www.oks-germany.com

a brand of
FREUDENBERG

The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark
Product restricted to professional users. Safety data sheet available for download at [www.oks-germany.com](#)
Our Customer and Technical service will be pleased to help should you have any further questions.