




### OKS 476

### Multipurpose Grease, for Food Processing Technology

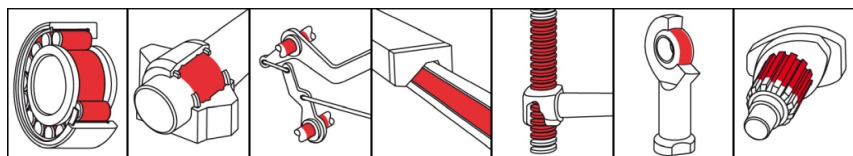

#### Description

Universal multipurpose grease for food processing technology for lubricating rolling and friction bearings and other machine elements.

#### Applications

- Grease lubrication of rolling and friction bearings, joints, linear drives and chains
- Lubrication of fittings, seals, moulded parts and elements of elastic rubber materials in the hot- and cold-water segment
- Lubrication of fittings or machines in dairies, breweries, bakeries, slaughterhouses, etc.

#### Advantages and benefits

- NSF H1 registered
- Reduces wear
- Excellent resistance to oxidation and ageing
- Resistant to hot and cold water, water vapour, watery-alkaline and acidic disinfectants and cleaning agents

#### Branches

- Catering equipment and food processing technology
- Rubber and plastic processing
- Glass and foundry industry
- Rail vehicle technology
- Iron and steel industry
- Plant and machine (tool) engineering
- Chemical industry
- Paper and packaging industry
- Municipal services
- Logistics
- Shipbuilding and marine technology

#### Application tips

Clean the lubricating points well for optimal effect. Before filling for first time, remove anti-corrosion agent. Fill the bearing such that all functional surfaces are certain of being greased. Fill normal bearings up to about 1/3 of the free space inside the bearing. Low-speed bearings (DN value < 50,000) and their housings should be filled completely. The bearing and machine manufacturer's instructions should be observed. Subsequent lubrication at the lubrication nipples by grease gun or by automatic lubrication system. Assess the lubrication frequency and quantity on basis of service conditions. If old grease cannot be removed, restrict the quantity of grease so as to avoid overlubricating the bearing. If lubrication frequencies tend to be low, you should aim for a full grease change. Only mix with suitable lubricants.

## OKS 476

### Multipurpose Grease, for Food Processing Technology

#### Packaging

- 400 ml Cartridge
- 1 kg Can
- 5 kg Hobbock
- 25 kg Hobbock
- 180 kg Drum

#### Technical data

|                                           | Standard               | Conditions   | Unit               | Value                                   |
|-------------------------------------------|------------------------|--------------|--------------------|-----------------------------------------|
| <b>Main components</b>                    |                        |              |                    |                                         |
| base oil                                  |                        |              |                    | semi-synthetic oil                      |
| thickener                                 |                        |              |                    | aluminium-complex soap                  |
| <b>Application related technical data</b> |                        |              |                    |                                         |
| marking                                   | analogue to DIN 51 502 |              |                    | KP2K-30                                 |
| Viscosity base oil                        | DIN 51 562-1           | at 40°C      | mm <sup>2</sup> /s | 240                                     |
| Viscosity base oil                        | DIN 51 562-1           | at 100°C     | mm <sup>2</sup> /s | 22                                      |
| drop point                                | DIN ISO 2176           |              | °C                 | > 220                                   |
| consistency                               | DIN 51 818             | DIN ISO 2137 | NLGI grade         | 2                                       |
| worked penetration                        | DIN ISO 2137           | 60DH         | 0.1 mm             | 265-295                                 |
| lower operating temperature               | DIN 51 805             | ≤ 1,400 hPa  | °C                 | -30                                     |
| upper operating temperature               |                        |              | °C                 | 110                                     |
| colour                                    |                        |              |                    | white                                   |
| density                                   | DIN 51 757             | at 20°C      | g/cm <sup>3</sup>  | 0.92                                    |
| water resistance                          | DIN 51 807-1           | 3h/90°C      | Degree             | 1-90                                    |
| DN value (dm x n)                         |                        |              | mm/min             | 400,000                                 |
| four-ball test rig welding load           | DIN 51 350-4           |              | N                  | 2,200                                   |
| <b>Properties and approvals</b>           |                        |              |                    |                                         |
| approval for food processing technology   |                        |              |                    | <a href="#">NSF H1, Reg.-Nr. 137619</a> |

**Klüber Lubrication München GmbH & Co. KG**  
 Geisenhausenerstraße 7 / 81379 München /  
 Germany / phone +49 89 7876-0

The data in this document is based on our general experience and knowledge at the time of publication and is intended to give information of possible applications to a reader with technical experience. It constitutes neither an assurance of product properties nor does it release the user from the obligation of performing preliminary field tests with the product selected for a specific application. All data are guide values which depend on the lubricant's composition, the intended use and the application method. The technical values of lubricants change depending on the mechanical, dynamical, chemical and thermal loads, time and pressure. These changes may affect the function of a component. We recommend contacting us to discuss your specific application. If possible we will be pleased to provide a sample for testing on request. Klüber products are continually improved. Therefore, Klüber Lubrication reserves the right to change all the technical data in this document at any time without notice.